

Low Pass Filter

Features

- high rejection
- sharp insertion loss roll off
- excellent VSWR, 1.1:1 typ.@ passband
- aqueous washable

Applications

- wireless communications
- receivers / transmitters

HT-RLP-105+



50Ω DC to 105 MHz

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
		(loss < 2 dB)	(loss > 20 dB)	Passband Typ.	Stopband Typ.
DC-105	116		145-165	1.1	20

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	0.5W max.

Permanent damage may occur if any of these limits are exceeded.


Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ			
0.5	0.13	0.01	35.22	2.0	6.26
10.0	0.20	0.00	29.65	5.0	6.19
50.0	0.41	0.00	37.09	10.0	6.11
75.0	0.63	0.01	32.32	20.0	5.96
85.0	0.75	0.01	31.58	25.0	6.16
100.0	1.08	0.01	22.50	45.0	6.69
105.0	1.28	0.02	24.06	50.0	6.82
112.0	1.99	0.08	13.30	55.0	6.90
116.0	3.18	0.18	7.69	60.0	7.20
120.0	5.42	0.29	4.25	65.0	7.41
126.0	10.34	0.37	1.93	70.0	7.70
145.0	27.98	0.37	0.70	75.0	8.06
165.0	47.88	0.51	0.50	80.0	8.61
180.0	67.19	1.63	0.43	85.0	9.16
300.0	78.51	3.90	0.20	95.0	10.51
500.0	73.18	2.18	0.10	100.0	11.81
750.0	83.89	3.52	0.10	105.0	13.57
1000.0	74.40	3.14	0.14	110.0	16.16

Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8


Outline Drawing

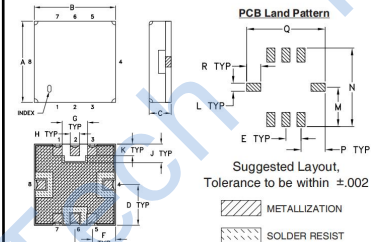

Outline Dimensions (inch/mm)

	A	B	C	D	E	F	G	H	J
	.350	.350	.100	.175	.075	.100	.110	.040	.080
	8.89	8.89	2.54	4.45	1.91	2.54	2.79	1.02	2.03
	K	L	M	N	P	Q	R		wt.
	.050	.040	.195	.390	.120	.390	.070		grams
	1.27	1.02	4.95	9.91	3.05	9.91	1.78		0.25

Suggested PCB Layout





NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .005"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

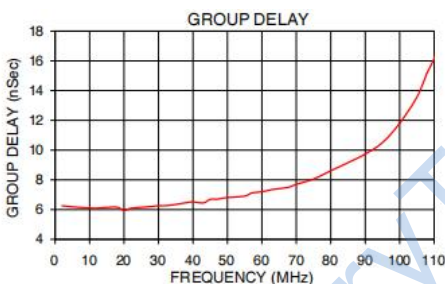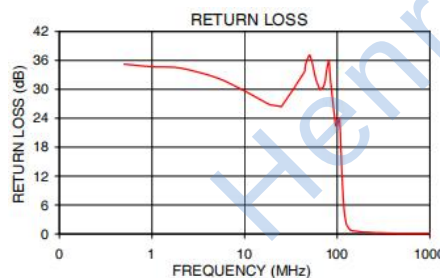

Functional Schematic

