


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	23/5/14	23/5/14

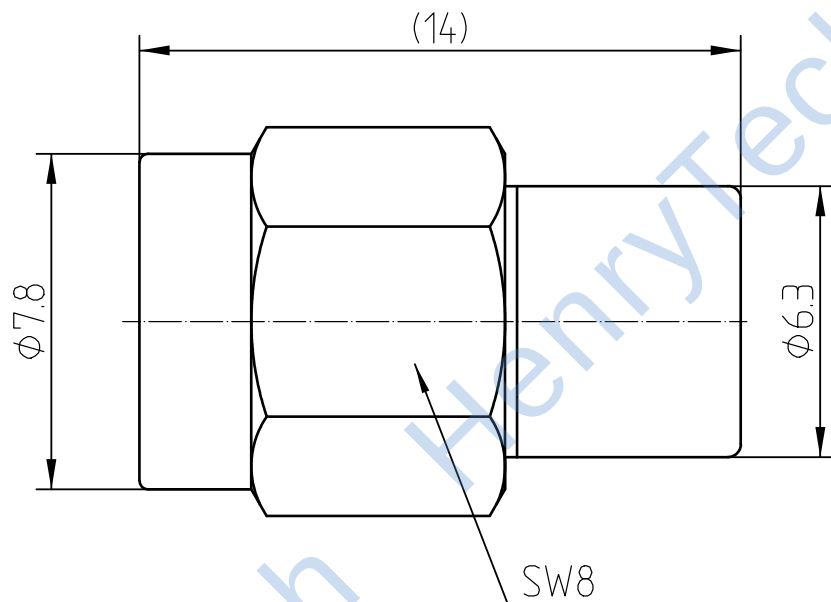

1 Electrical

1.1 Impedance

50 Ω

1.2 Frequency

DC ~6GHz

1.3 VSWR

1.20:1

2 Environmental&Mechanical

2.1 Temperature range

-40℃ ~+125℃

2.2 RoHs Compliant

2.3 Durability

>500 cycles

3 Materials&plating

3.1 Body:

Brass; gold plated

3.2 Insulator:

Teflon

3.3 Contact Pin:

Bronze, gold plated

3.4 Nut:

Brass; gold plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Tel:Lee13890694956

Web:www.henglitaitech.com/cn

DRAWN : H.wei 25/5/14
ENGINEER: L. yu 25/5/14
APPROVED : W. yi 25/5/14
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:

RF TERMINATION

SMA Male Conn. Termination 1W

PART NO: HL-SMA-50JRB 6GHz



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------