


HLT-0.5/6-4S **4-Way Power Divider** **Specifications**

SN	Parameters	Specifications
1	频率范围 Frequency Range	500~6000 MHz
2	插入损耗 Insertion Loss	≤ 1.8dB (Excluding theoretical loss 未含理论损耗 6.0 dB)
3	输入驻波 Input Port VSWR	Typ.1.16 / Max.1.25
4	输出驻波 Output Port VSWR	Typ.1.12 / Max.1.20
5	隔离度 Isolation	Typ.28dB / Min.20dB
6	幅度平衡 Amplitude Balance	≤ 0.3dB
7	相位平衡 Phase Balance	±4°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female
10	承受功率 Power Rating	Splitter 分路器用时 30W; Combiner 合路器用时 2W
11	工作温度 Operation Temperature	-35°C ~ +75°C
12	表面处理 Surface Finishing	Sandblasting natural color conductive oxide 喷砂本导
13	外形尺寸 Outline Dimensions	100*62*12 (mm)
14	重量 Weight	185 (g)



Note: Dimensions (mm / [inch]), General tolerance (±0.3)

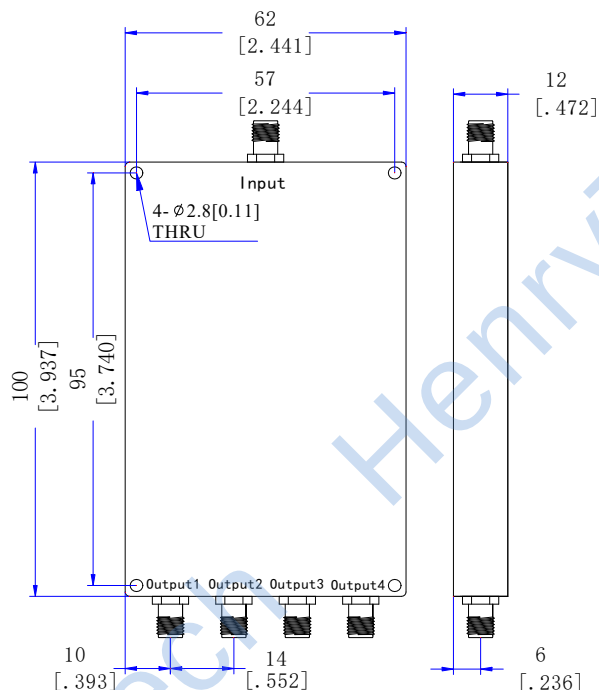