


HLT-0.5/8-4S

4-Way Power Divider

Specifications

SN	Parameters	Specifications
1	Frequency Range	500~8000 MHz
2	Insertion Loss	≤ 2.0 dB (Excluding theoretical loss 未含理论损耗 6.0 dB)
3	Input Port VSWR	Typ.1.18 / Max.1.3
4	Output Port VSWR	Typ.1.12 / Max.1.2
5	Isolation	Typ.26dB / Min.18dB
6	Amplitude Balance	±0.3dB
7	Phase Balance	±4°
8	Impedance	50 Ohms
9	Input / Output Connectors	SMA-Female (Passivated Stainless Steel)
10	Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
11	Operation Temperature	-45°C ~ +85°C
12	Surface Finishing	Gray paint / Black paint / Blue paint
13	Outline Dimensions	86*56*10 (mm)
14	Weight	120 (g)

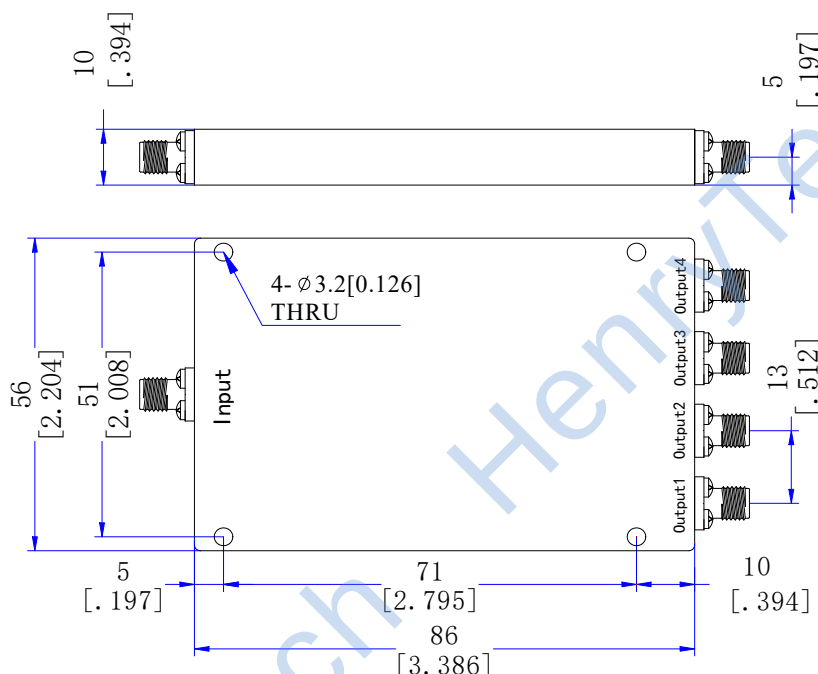

Note: Dimensions (mm / [inch]), General tolerance (±0.3)

