


HLT-2/8-3S

3-Way Power Divider


Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	2000~8000 MHz
2	插入损耗 Insertion Loss	≤ 1.0 dB (Excluding theoretical loss 未含理论损耗 4.8 dB)
3	输入驻波 Input Port VSWR	Typ.1.18 / Max.1.30
4	输出驻波 Output Port VSWR	Typ.1.14 / Max.1.25
5	隔离度 Isolation	Typ.26dB / Min.18dB
6	幅度平衡 Amplitude Balance	±0.5dB
7	相位平衡 Phase Balance	±5°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female (Passivated Stainless Steel)
10	承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
11	工作温度 Operation Temperature	-45°C ~ +85°C
12	表面处理 Surface Finishing	Black paint / Blue paint 黑色烤漆/蓝色烤漆
13	外形尺寸 Outline Dimensions	66.5*37.5*10 (mm)
14	重量 Weight	64 (g)

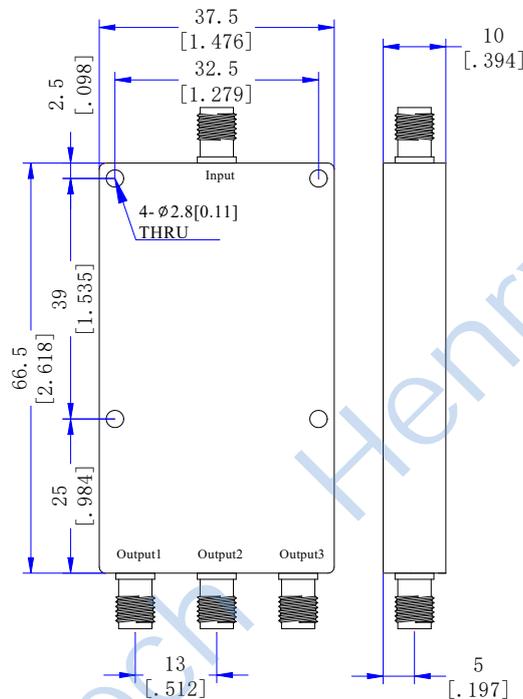


Note: Dimensions (mm / [inch]), General tolerance (±0.3)

HenryTech

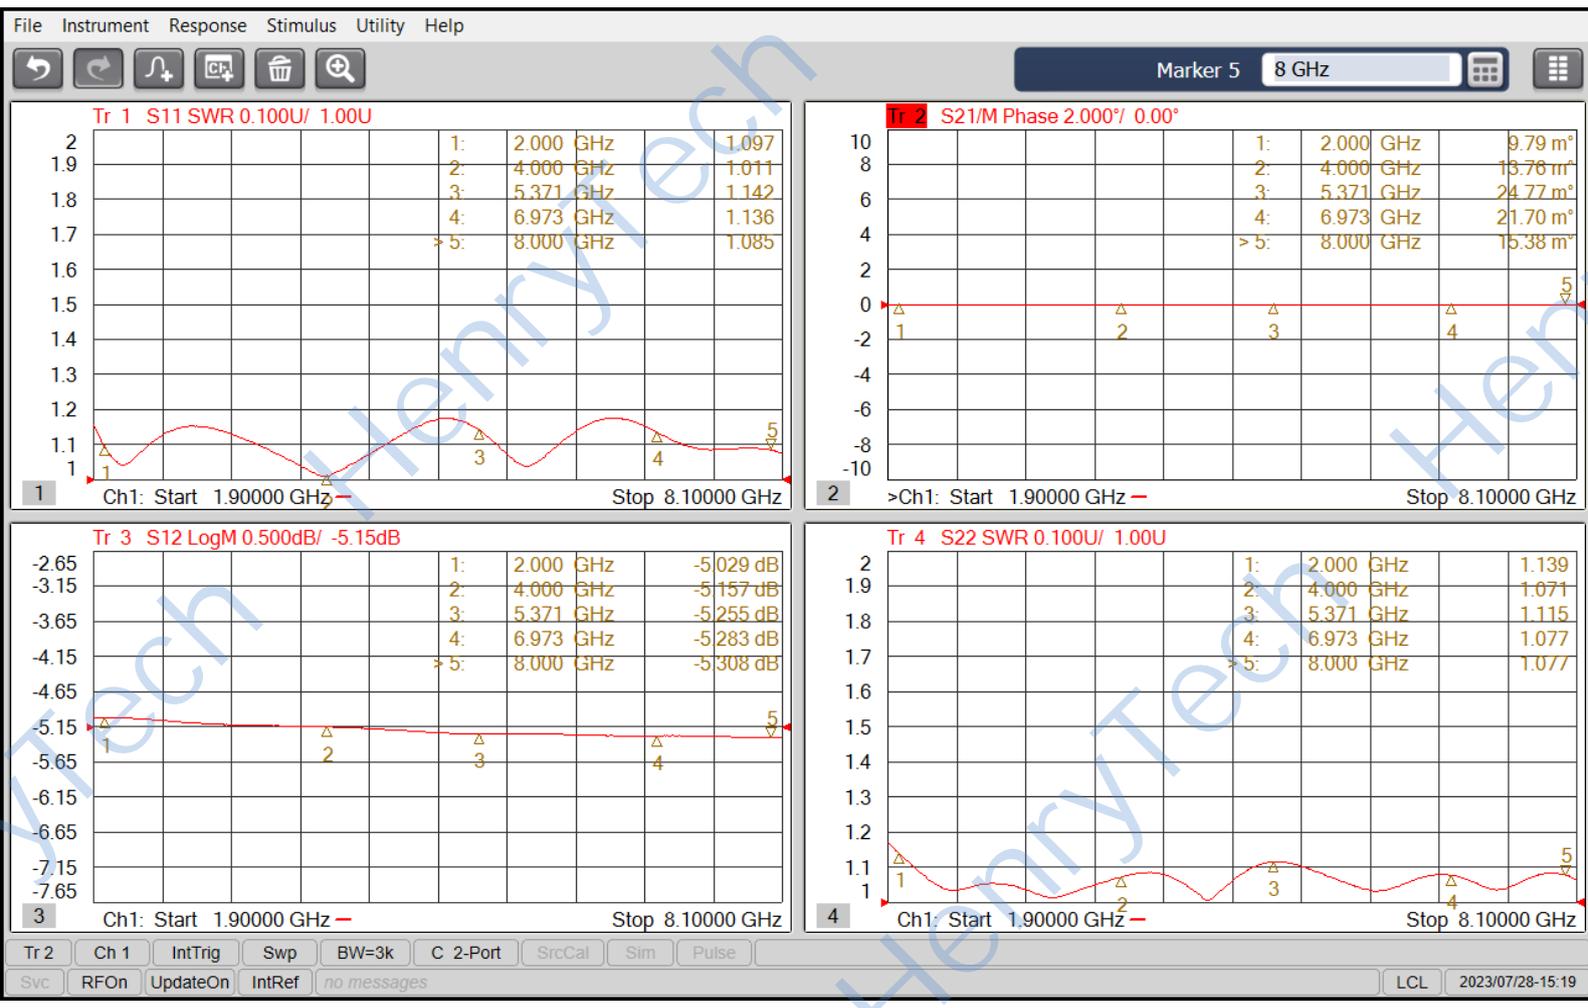


HenryTech


HenryTech

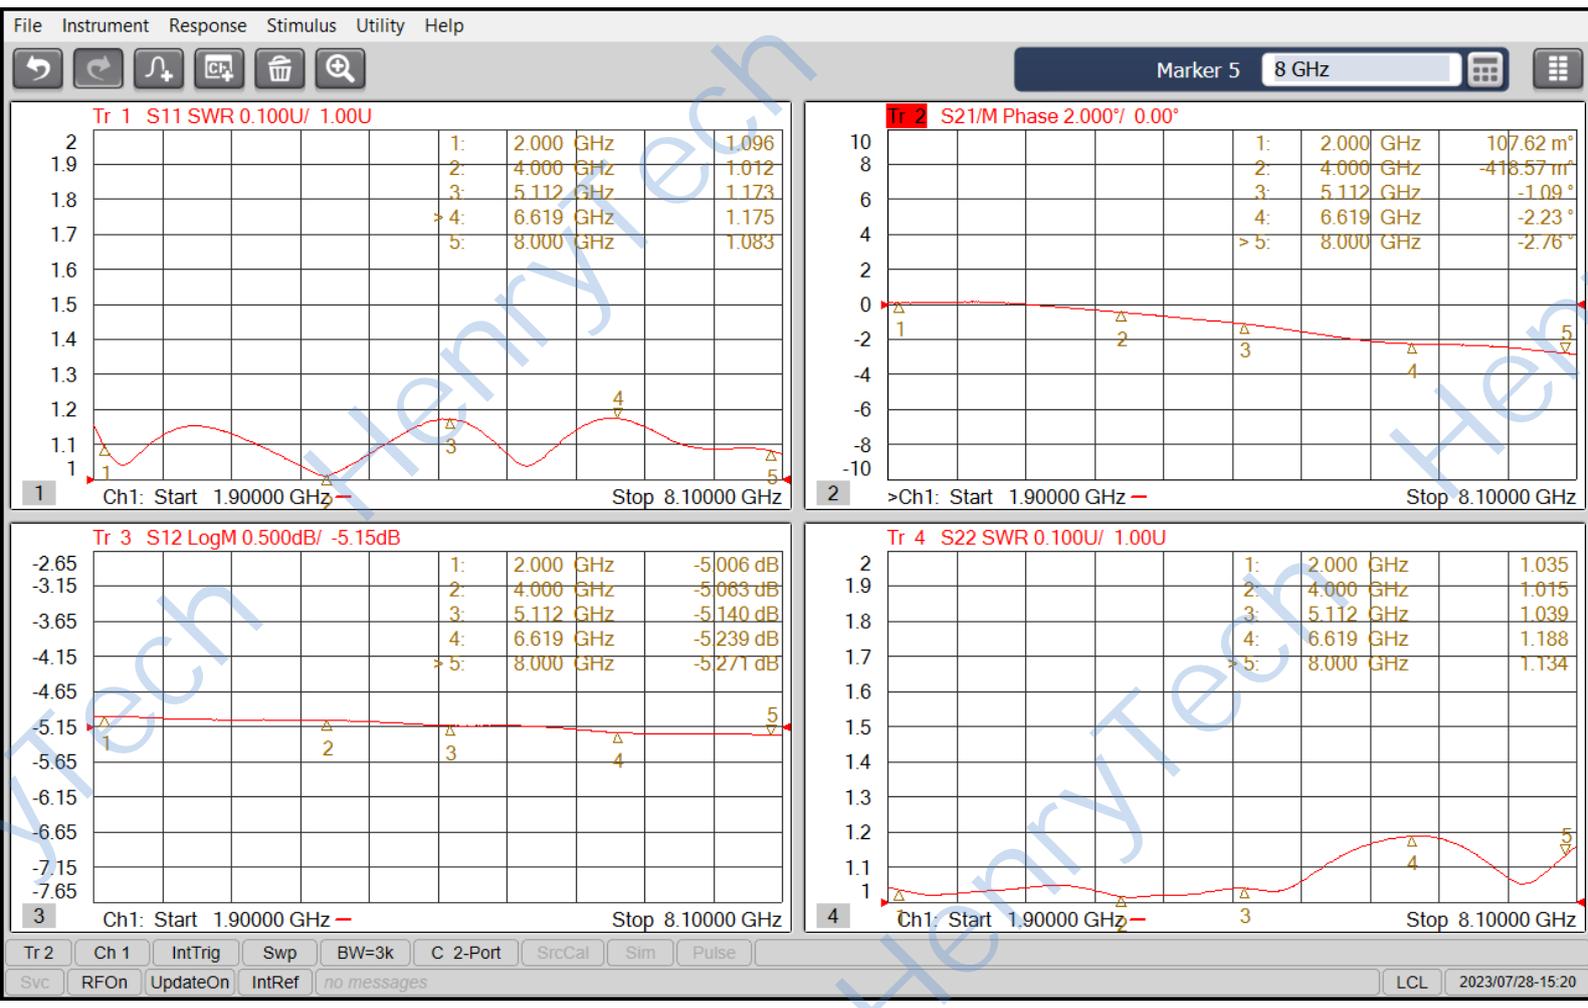

HenryTech

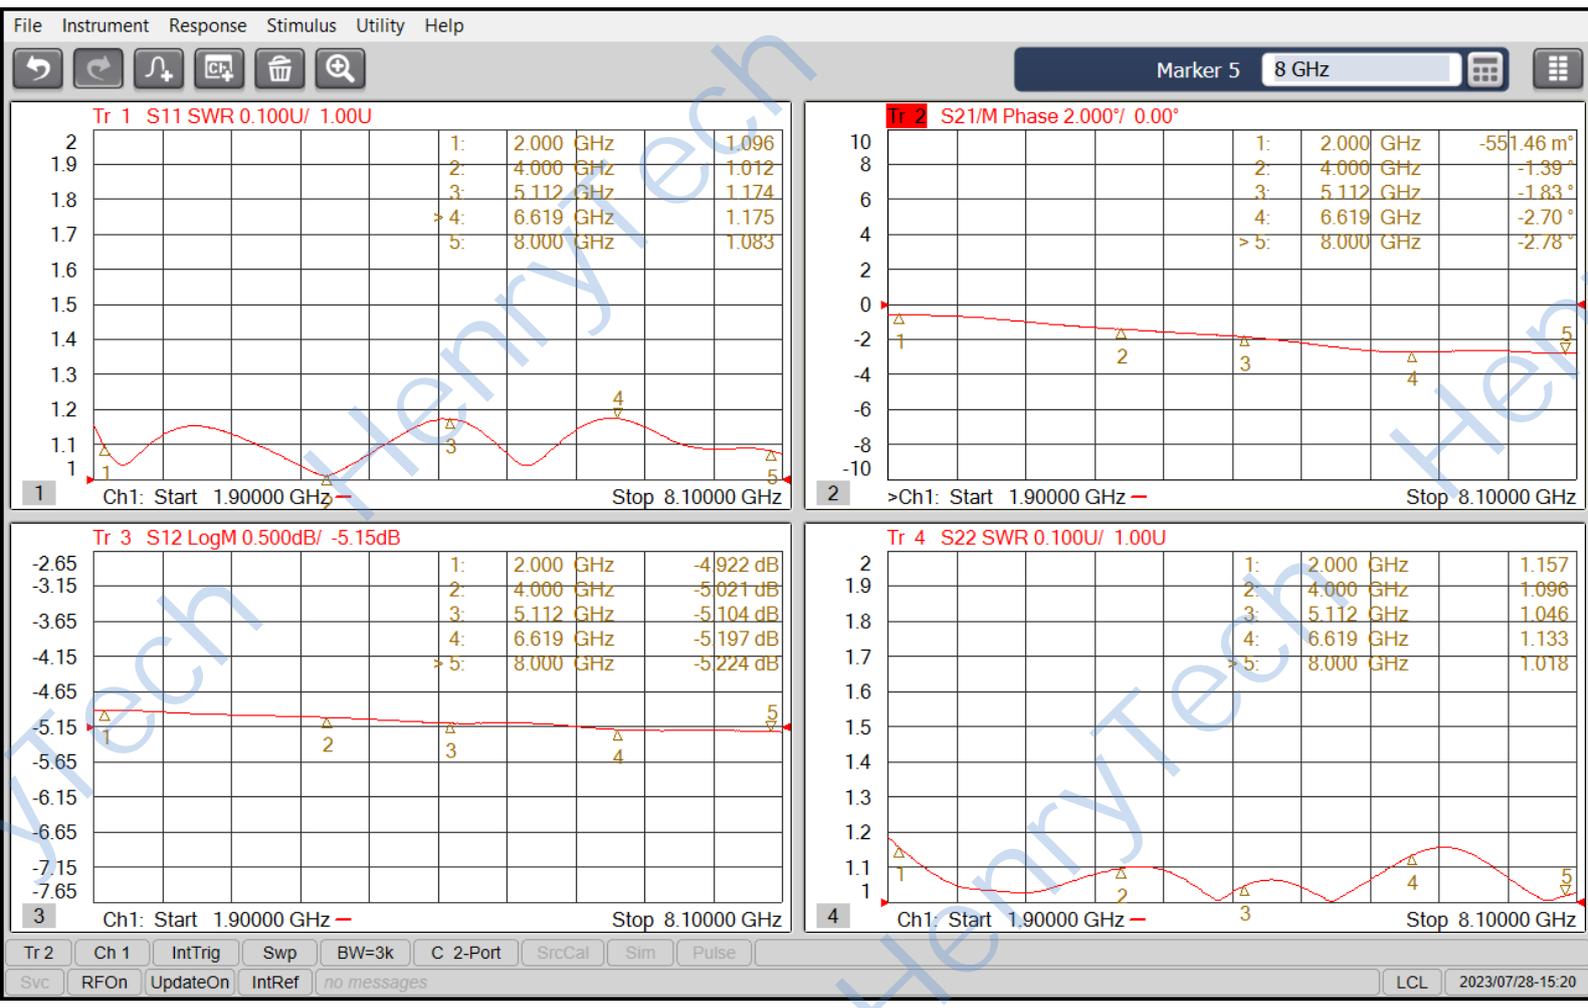


HenryTech

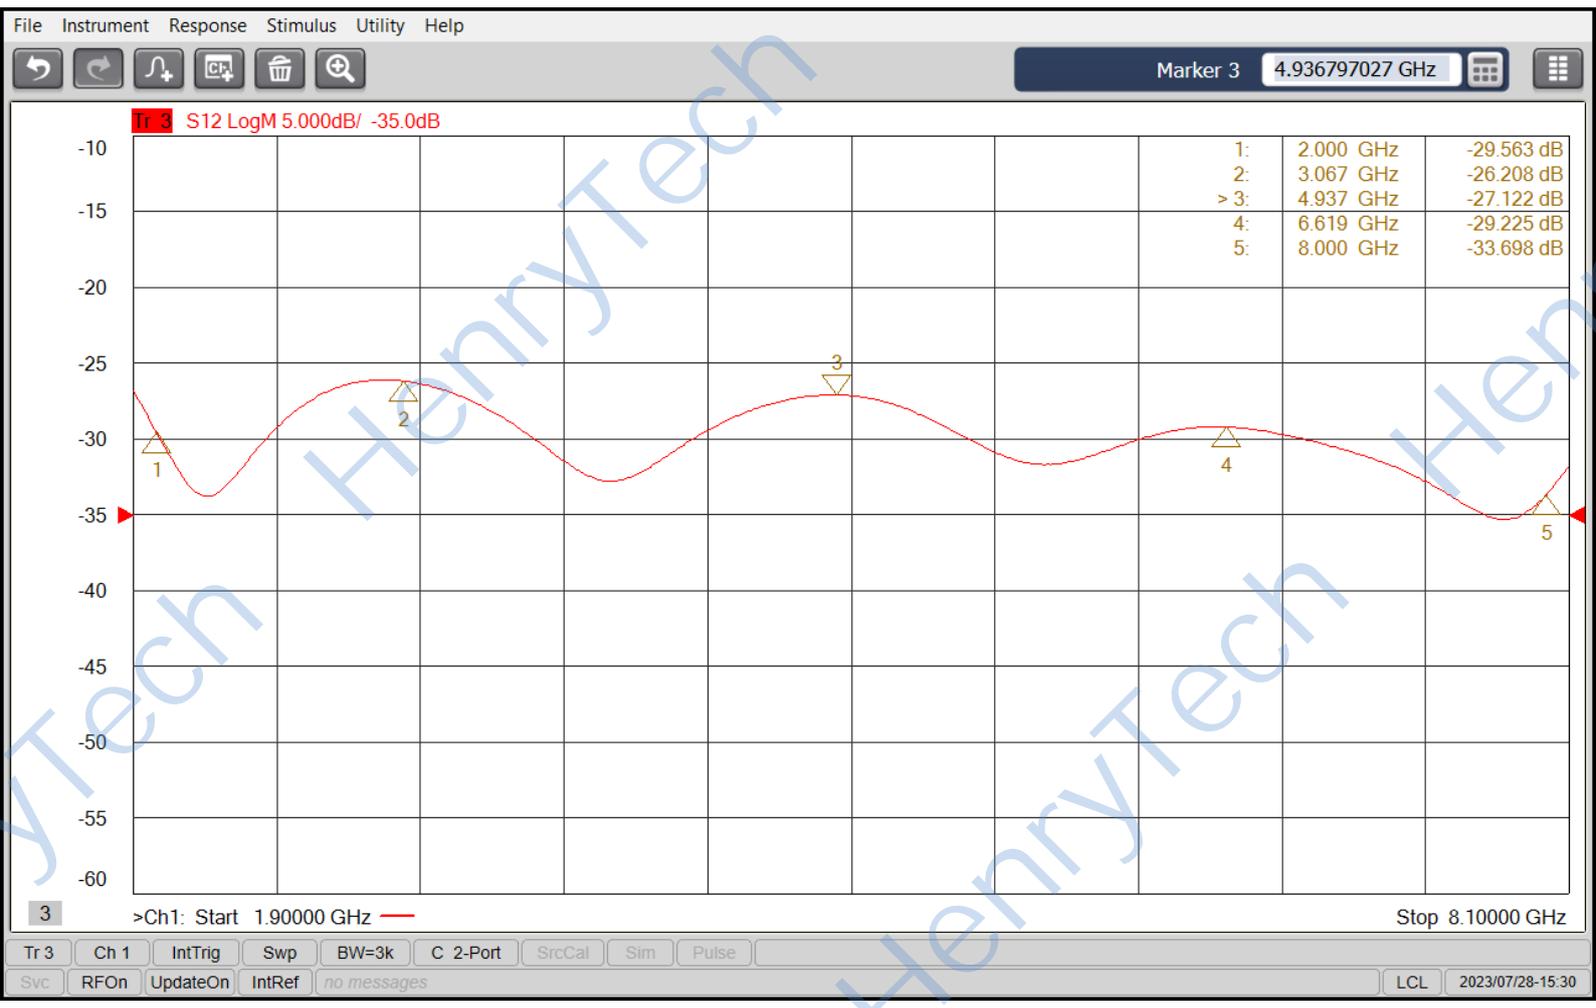


HenryTech


HenryTech

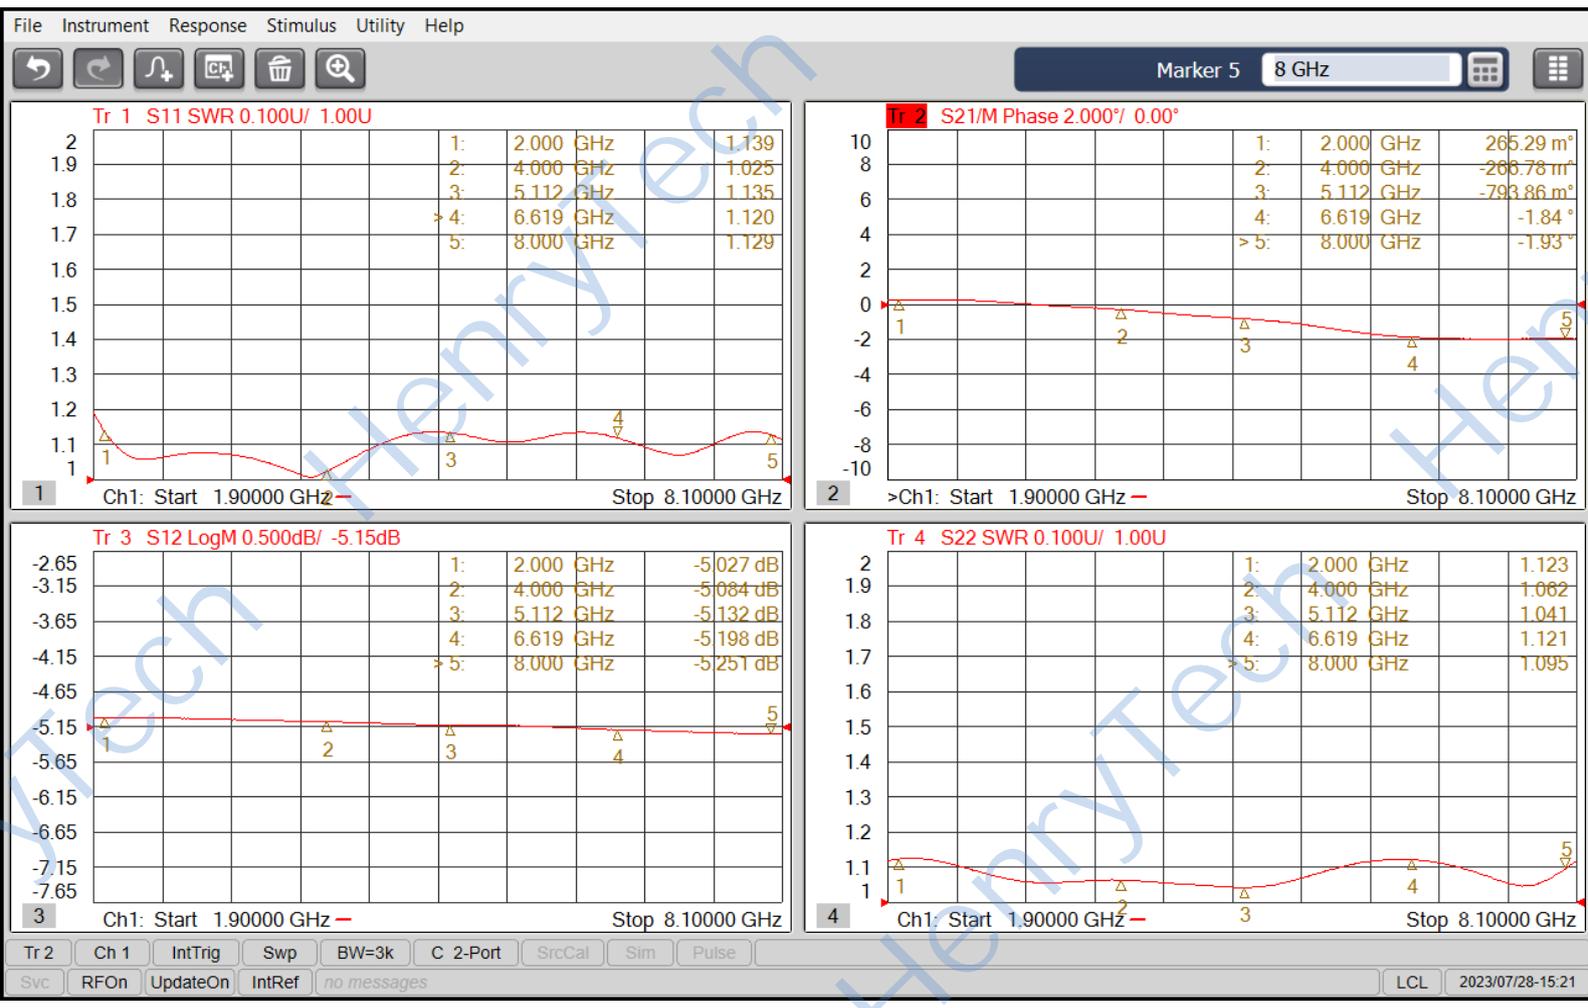

HenryTech

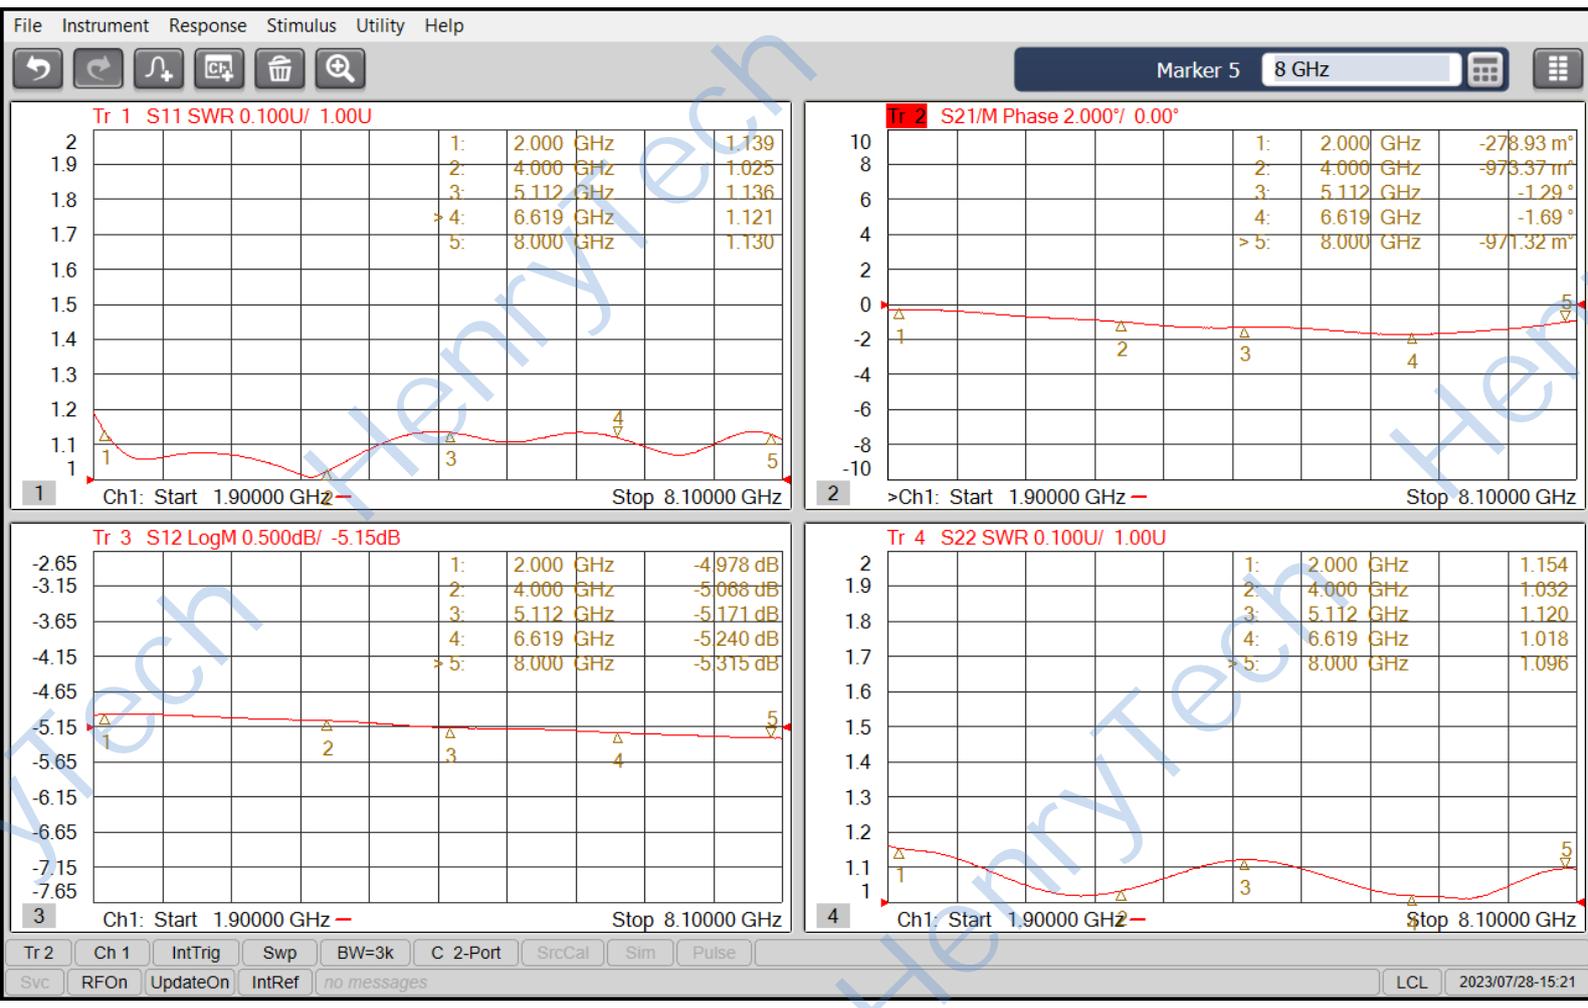

HenryTech

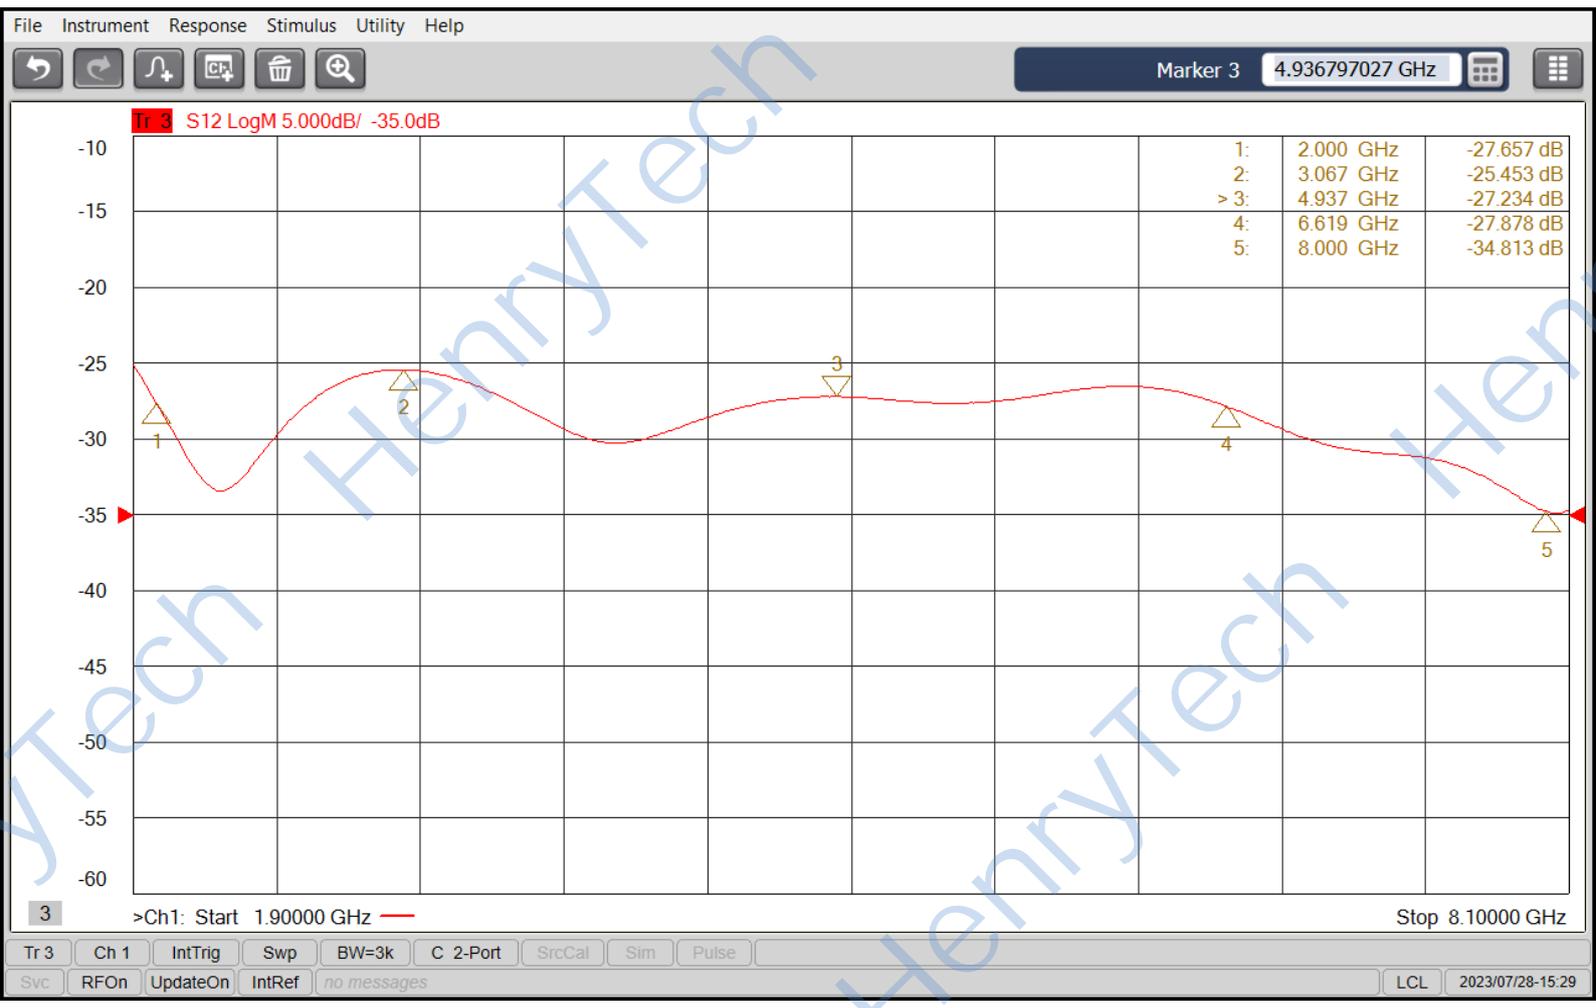

HenryTech




HenryTech




HenryTech

HenryTech

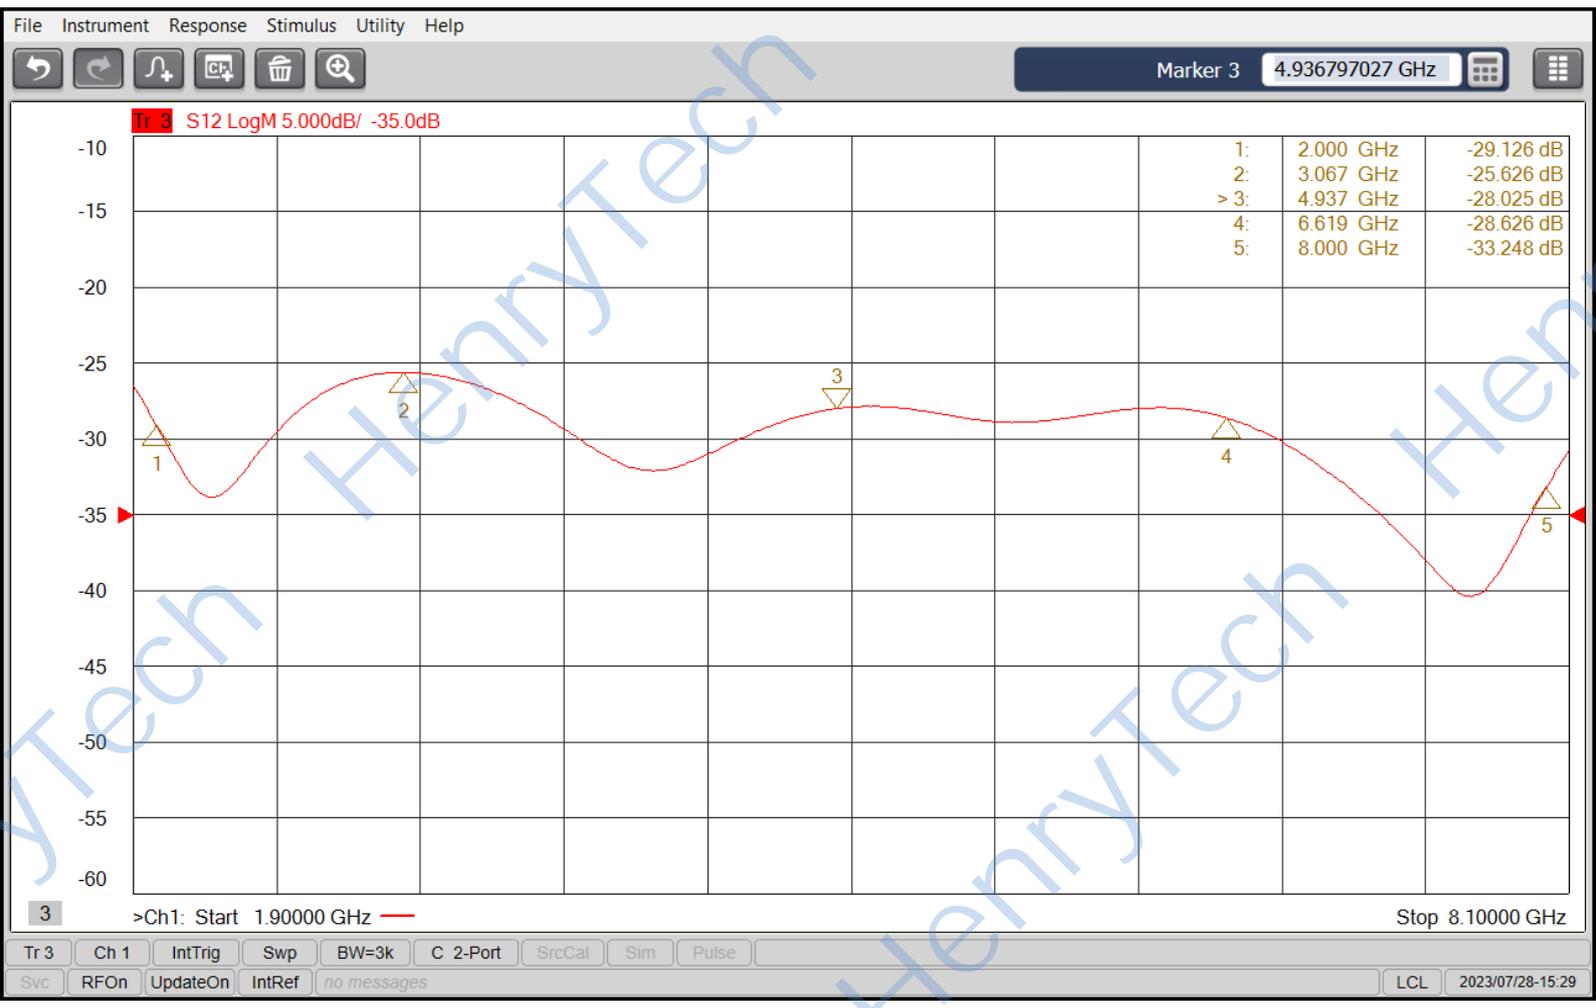


HenryTech

HenryTech

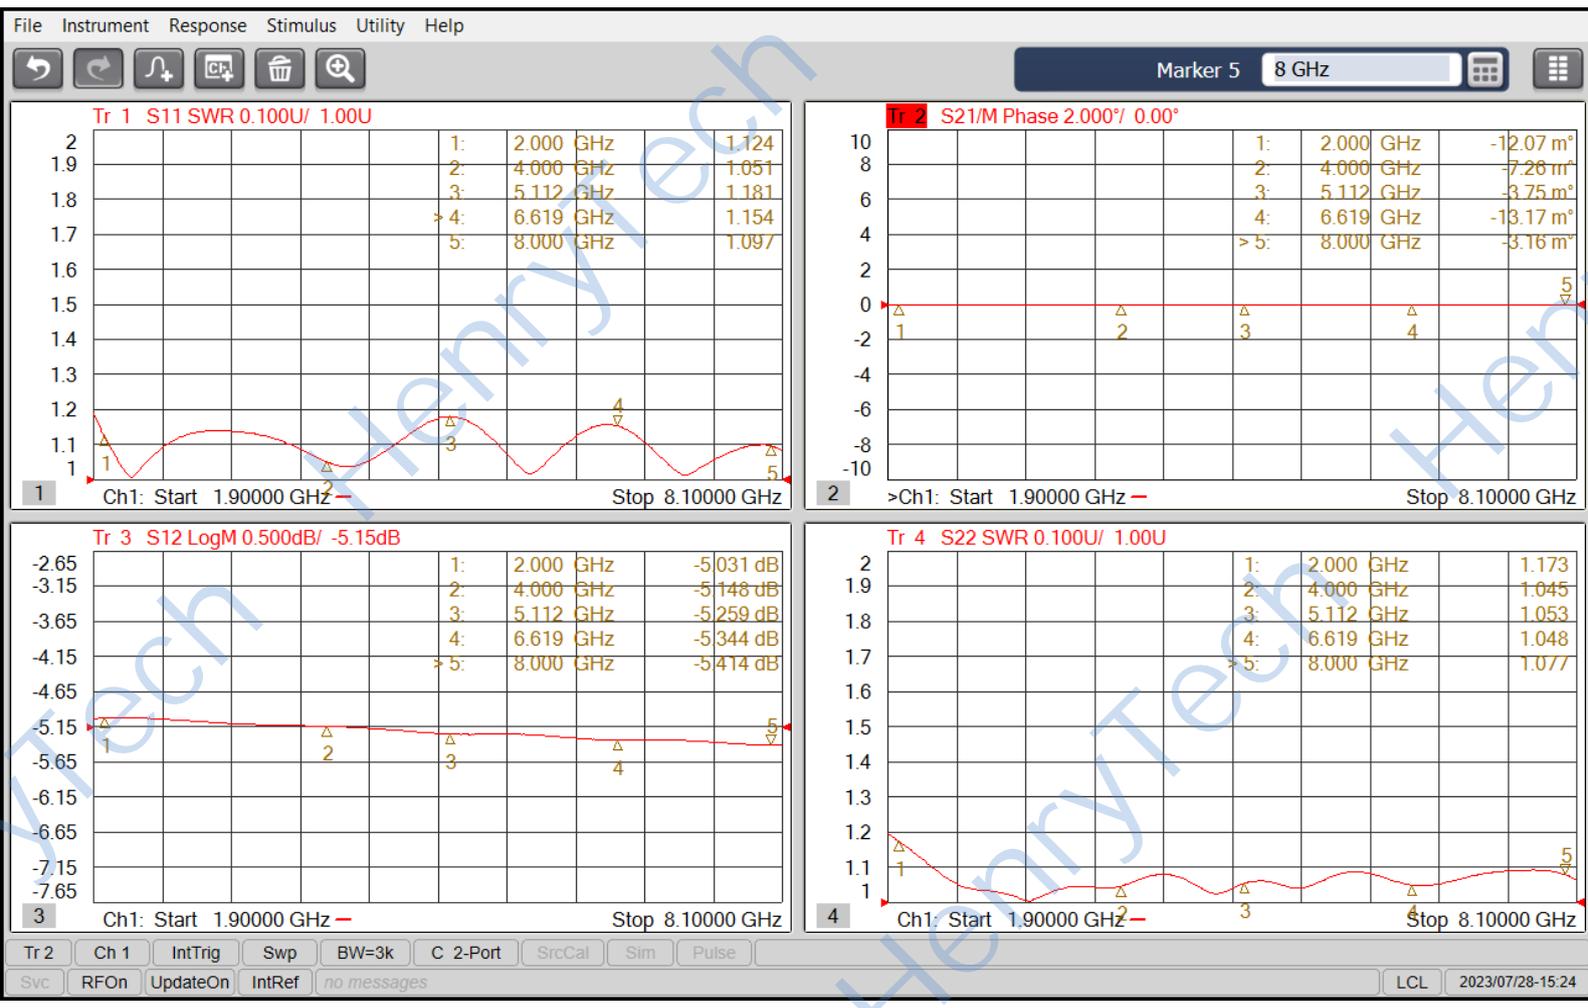

HenryTech

HenryTech

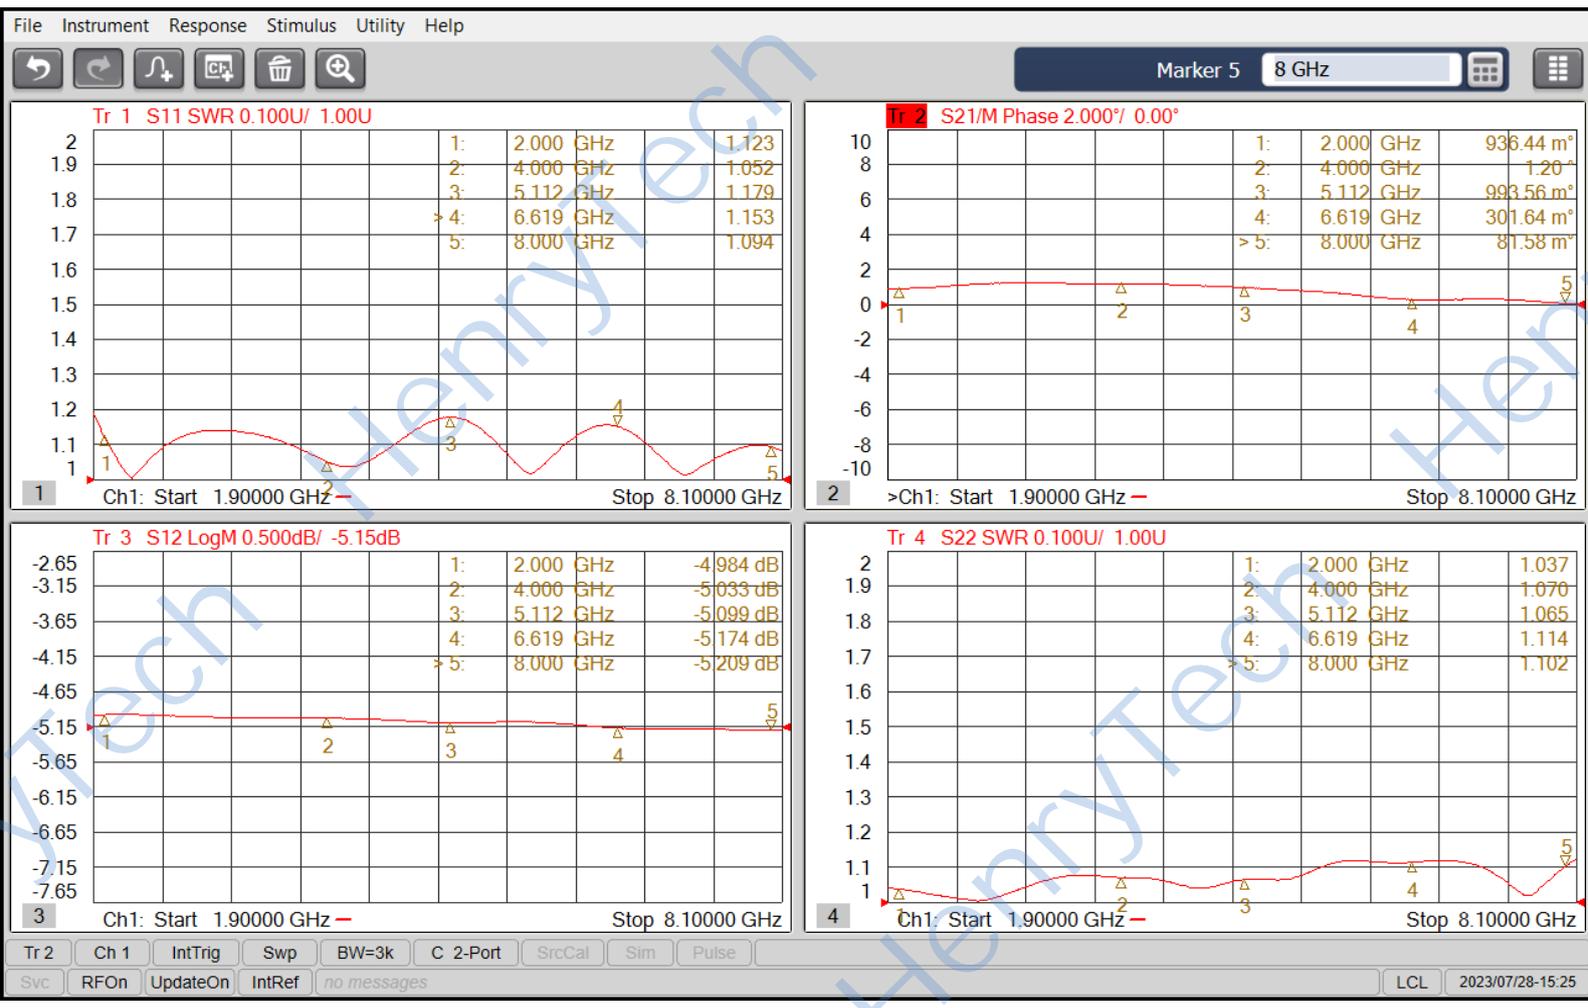


HenryTech

HenryTech




HenryTech

HenryTech

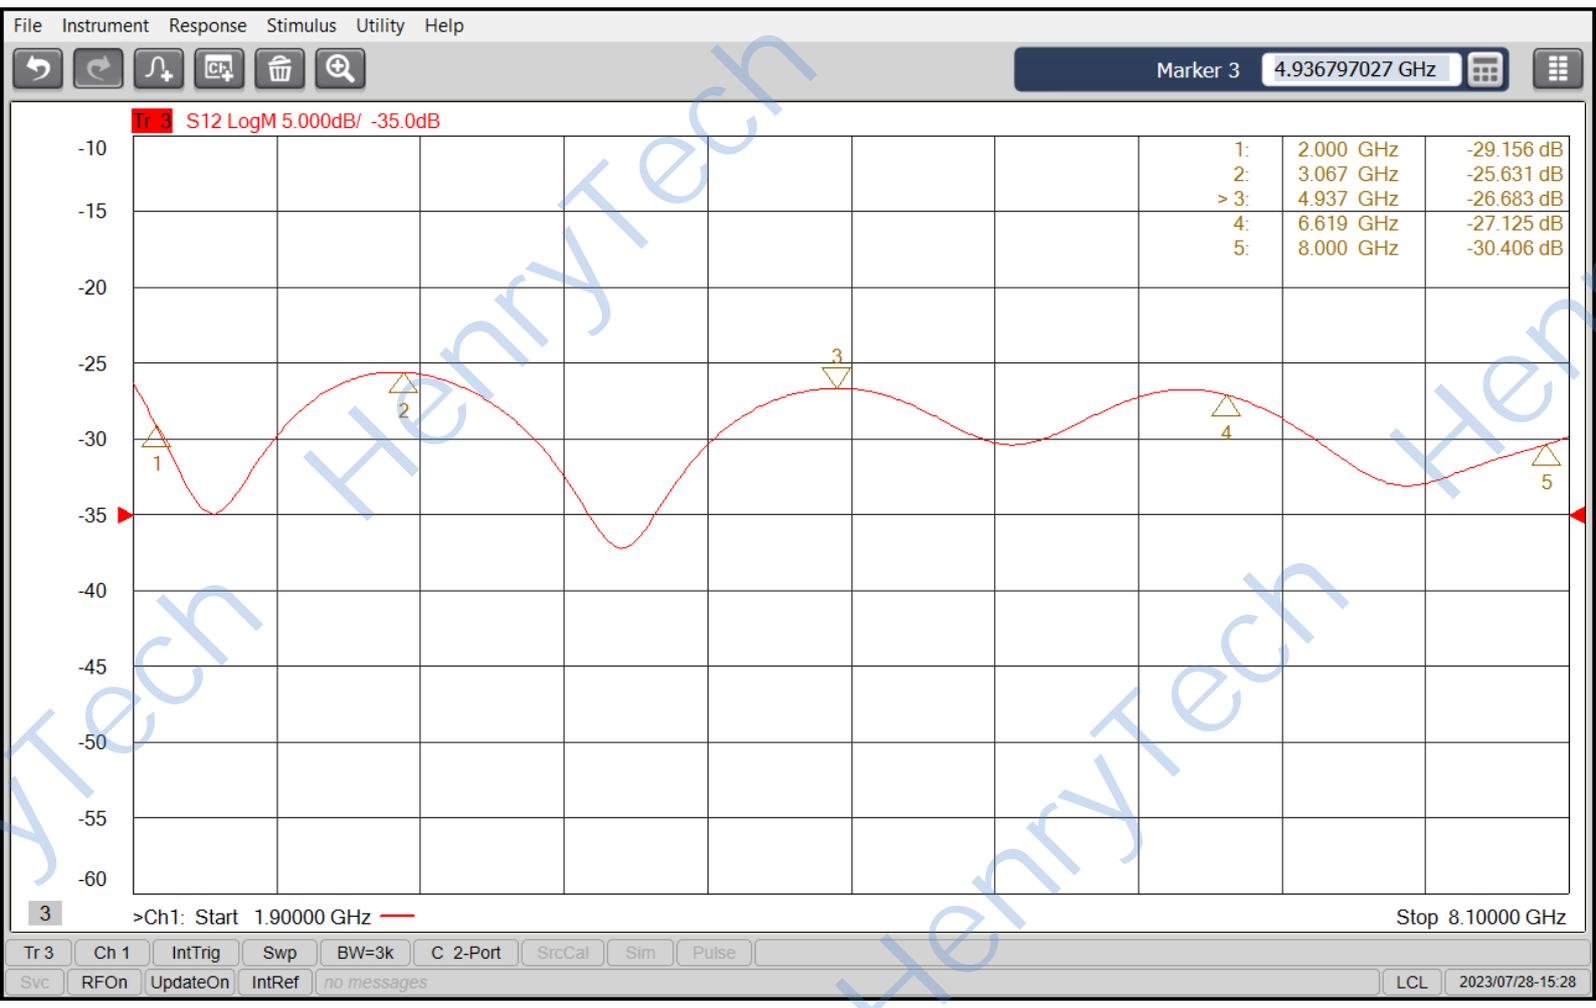

HenryTech

HenryTech

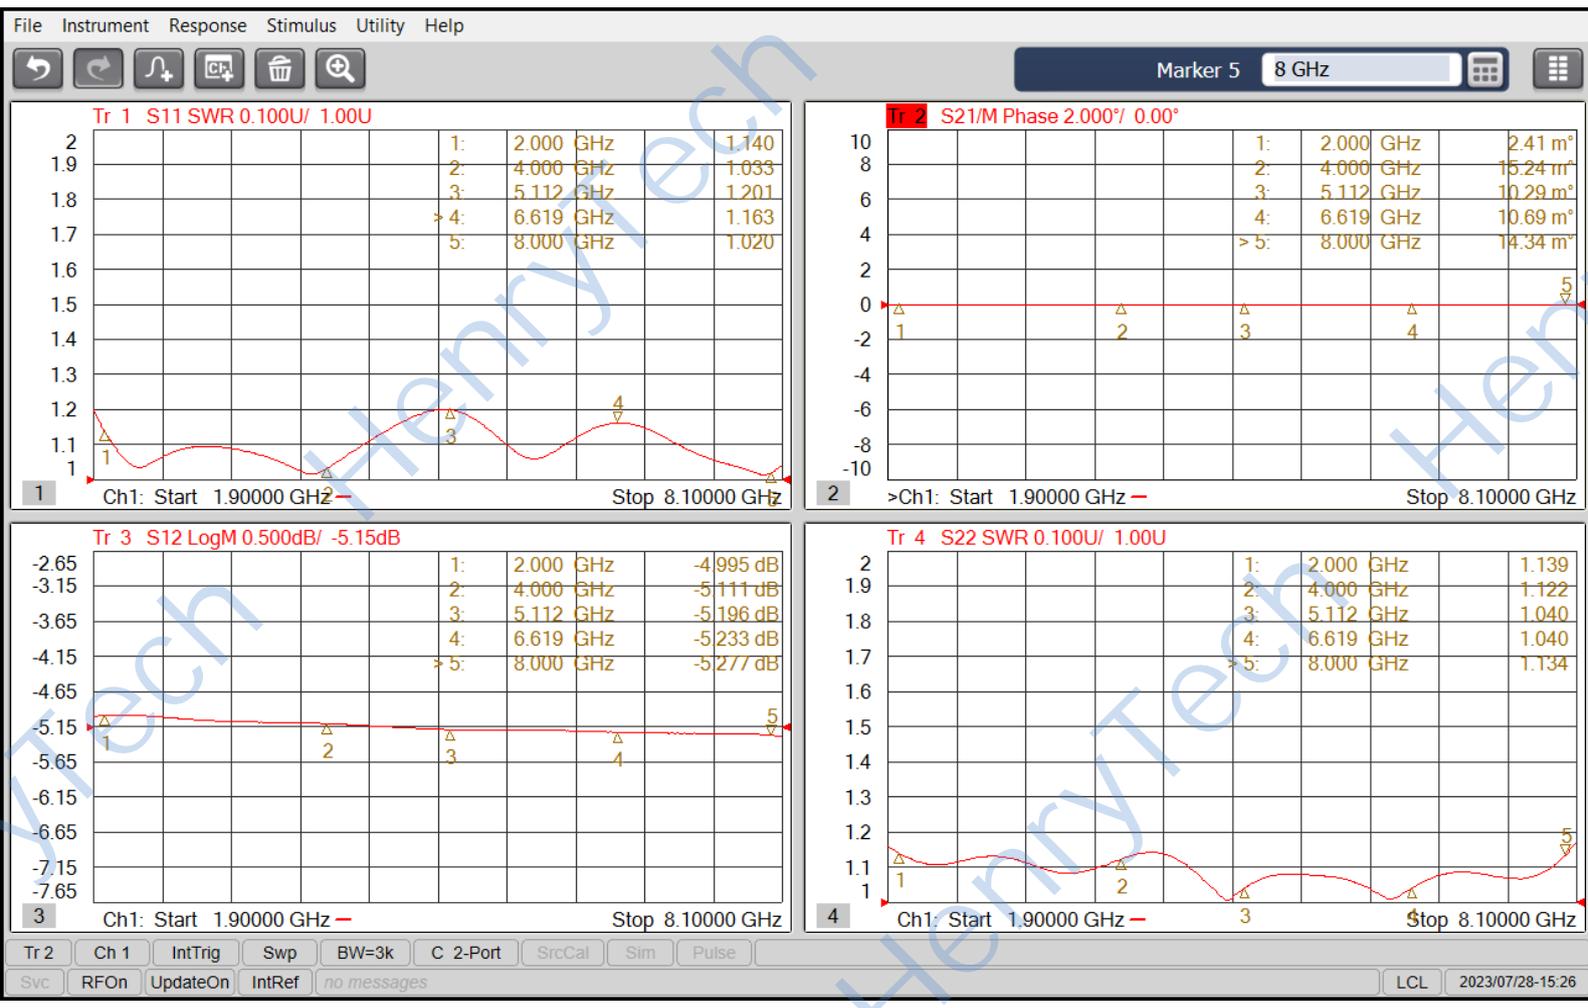

HenryTech




HenryTech

HenryTech



HenryTech

HenryTech

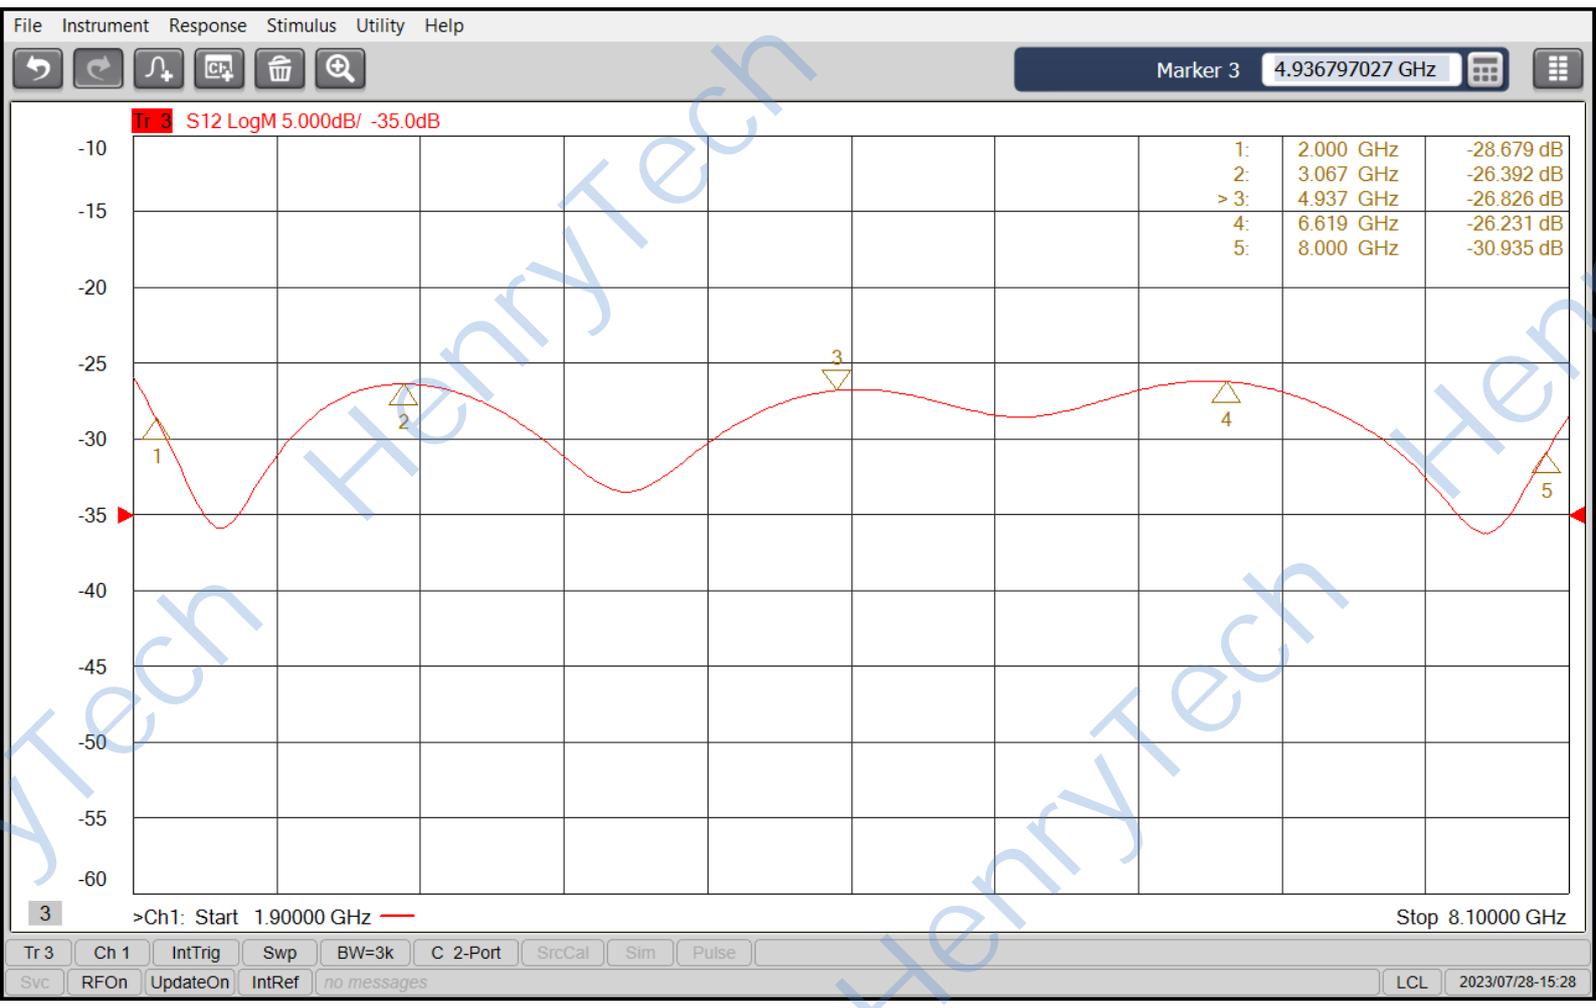

HenryTech