


HLT-2/8-8S

8-Way Power Divider

Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	2000~8000 MHz
2	插入损耗 Insertion Loss	≤ 1.5 dB (Excluding theoretical loss 未含理论损耗 9.0 dB)
3	输入驻波 Input Port VSWR	Typ.1.16 / Max.1.35
4	输出驻波 Output Port VSWR	Typ.1.14 / Max.1.25
5	隔离度 Isolation	Typ.25dB / Min.18dB
6	幅度平衡 Amplitude Balance	±0.4dB
7	相位平衡 Phase Balance	±5°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female (Passivated Stainless Steel)
10	承受功率 Power Rating	Splitter 分路器用时 30W; Combiner 合路器用时 2W
11	工作温度 Operation Temperature	-45℃ ~ +85℃
12	表面处理 Surface Finishing	Black paint 黑色烤漆
13	外形尺寸 Outline Dimensions	63*108*10 (mm)
14	重量 Weight	160 (g)

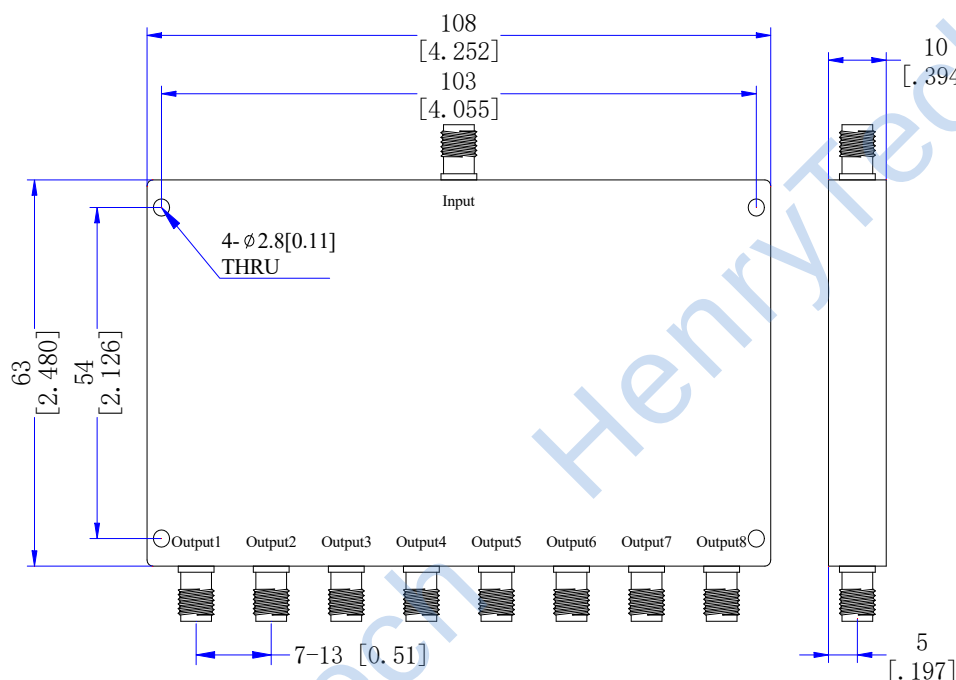

Note: Dimensions (mm / [inch]), General tolerance (±0.3)

