


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

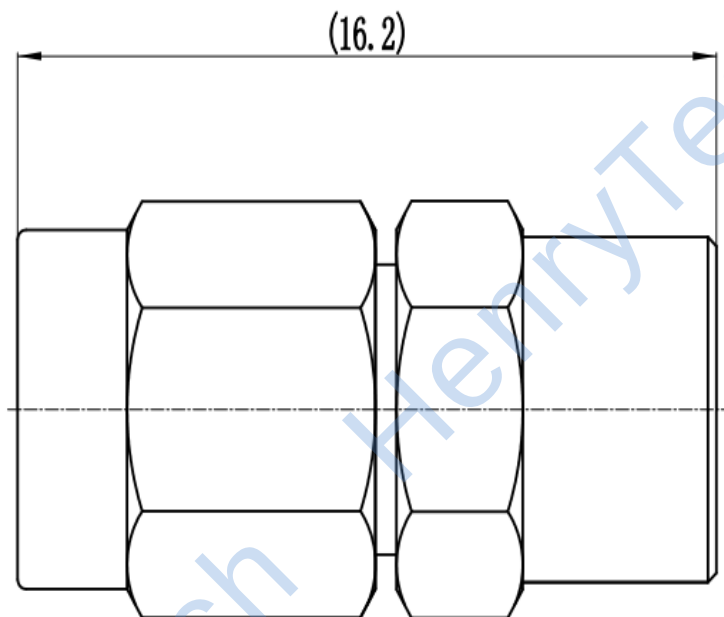

1 Electrical

1.1 Impedance	50 Ω
1.2 Frequency	DC~40GHz
1.3 VSWR	1.30:1
1.4 Power	0.5W

2 Materials&plating

2.1 Body:	Stainless Steel; Passivated
2.2 Insulator:	Pei
2.3 Contact Pin:	Beryllium-copper, gold plated
2.4 Nut:	Stainless Steel; Passivated

Tel:Lee13890694956

Web:www.hltchips.com

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:
Termination
2.92mm Male Conn.
Termination

PART NO: HL-2.92-50JRCG



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------