


# HLT-0.95/2.15-8N

## 8-Way Power Divider

### Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	950~2150 MHz
2	插入损耗 Insertion Loss	≤ 1.2dB (Excluding theoretical loss 未含理论损耗 9.0dB)
3	输入驻波 Input Port VSWR	Typ.1.16 / Max.1.25
4	输出驻波 Output Port VSWR	Typ.1.14 / Max.1.20
5	隔离度 Isolation	Typ.26dB / Min.20dB
6	幅度平衡 Amplitude Balance	±0.3dB
7	相位平衡 Phase Balance	±4°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	N-Female
10	承受功率 Power Rating	Splitter 分路器用时 30W; Combiner 合路器用时 2W
11	工作温度 Operation Temperature	-35°C ~ +75°C
12	表面处理 Surface Finishing	Sandblasting natural color conductive oxide 喷砂本导
13	馈电 Power Supply	DC24V 3A 直流电压从“Output 1”馈入，从“Input”馈出
14	外形尺寸 Outline Dimensions	196*88*20 (mm)
15	重量 Weight	840 (g)

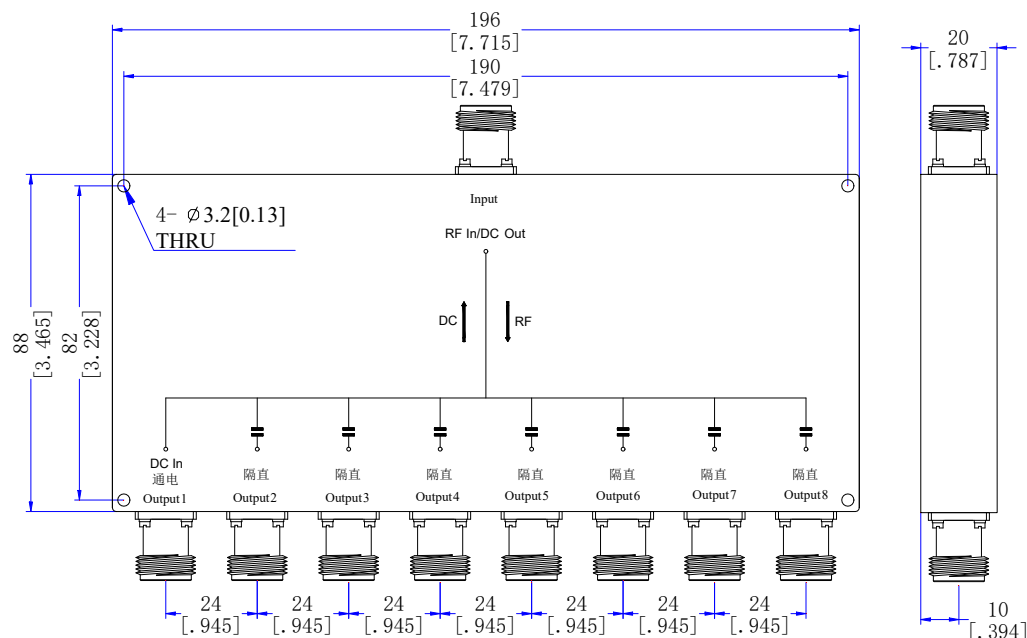

Note: Dimensions (mm / [inch]), General tolerance (±0.3)