

支持定制各类微带功分器 Support all kinds of customized power dividers


技术文件 Technical Data Sheet

文档编号 DN: HLT001-170606-A0

HLT-1/18-4S

4-Way Power Divider Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	1000~18000 MHz
2	插入损耗 Insertion Loss	≤ 2.5dB(Excluding theoretical loss 未含理论损耗 6.0dB)
3	输入驻波 Input Port VSWR	Typ.1.19 / Max.1.55
4	输出驻波 Output Port VSWR	Typ.1.12 / Max.1.50
5	隔离度 Isolation	Typ.24dB / Min.16dB
6	幅度平衡 Amplitude Balance	±0.4dB
7	相位平衡 Phase Balance	±5°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female
10	承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
11	工作温度 Operation Temperature	-45°C ~ +85°C
12	表面处理 Surface Finishing	黑色烤漆 Black paint
13	外形尺寸 Outline Dimensions	99*71*10 (mm)
14	重量 Weight	180 (g)

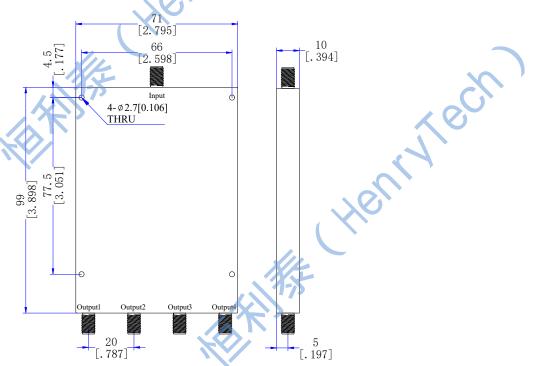

Note: Dimensions (mm / [inch]), General tolerance (±0.3)

成都恒利泰科技有限公司 Chengdu HenryTech Technology Co., Ltd

Henrylech

> TEL: +86-13890694956 (李工Mr.Li) E-mail: mr_li@henglitaitech.com

页码 Page 1 of 1