


# HLT-20/3000-5S

## 5-Way Resistor Power Divider

### Specifications

SN	Parameters	Specifications
1	Frequency Range	20~3000 MHz
2	Insertion Loss	$\leq 15.0 \pm 1$ dB
3	Input Port VSWR	$\leq 1.25: 1$
4	Output Port VSWR	$\leq 1.25: 1$
5	Isolation	$\geq 14$ dB
6	Amplitude Balance	$\pm 0.6$ dB
7	Impedance	50 Ohms
8	Input/Output Connectors	SMA-Female
9	Power Rating	2 W
10	Operation Temperature	$-35^{\circ}\text{C} \sim +75^{\circ}\text{C}$
11	Surface Finishing	Black paint

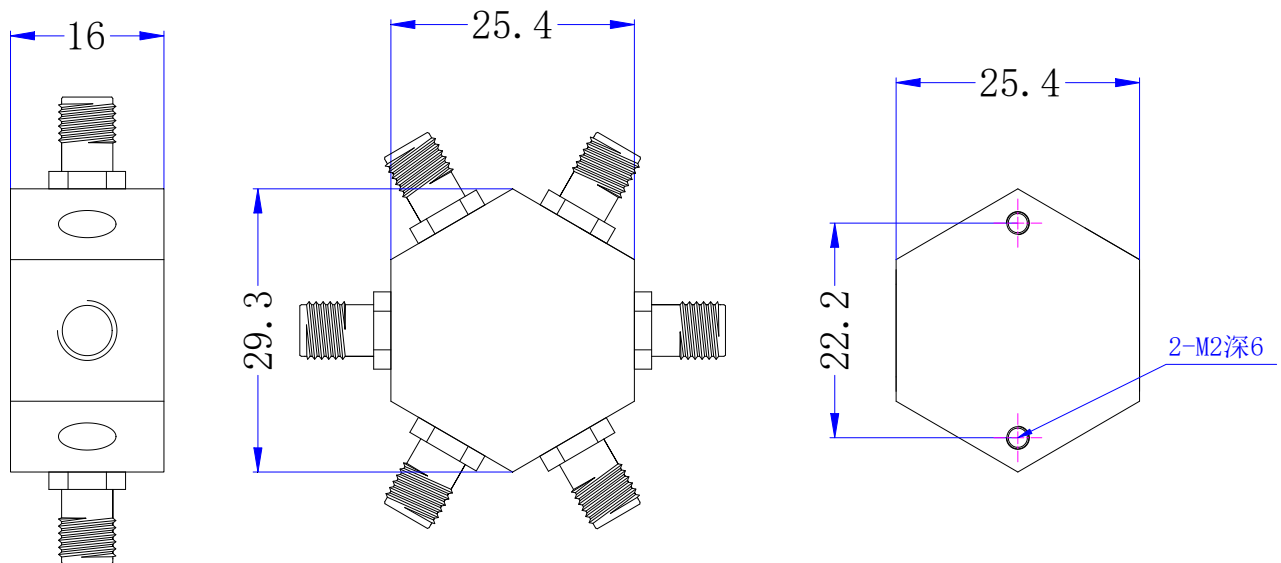

Note: Dimensions (mm / [inch]), General tolerance ( $\pm 0.5$ )