

Features

- Excellent power handling
- small size
- Very good rejection
- temperature stable
- LTCC construction , and has good moisture resistance, corrosion resistance, high reliability.

Applications


- Harmonic Rejection
- VHF/UHF transmitters / receivers
- Base Station/Micro base station of Mobile Communication , Internet of things terminal、 lab use.

HT-LFCG-1525+




50Ω DC to 1525 MHz

Functional Schematic




Typical Frequency Response




Electrical Specifications at 25°C

Parameter		F#	Frequency(MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	DC-1525	-	1.5	2.0	dB
	Freq.Cut-Off	F2	1710	-	3.0	-	dB
	Return Loss	DC-F1	DC-1525	-	15	-	dB
Stop Band	Rejection Loss	F3-F4	2125-2350	20	30	-	dB
		F4-F5	2350-2850	30	40	-	dB
		F5-F6	2850-7000	40	50	-	dB
		F6-F7	7000-12000	25	30	-	dB


INSERTIONLOSS

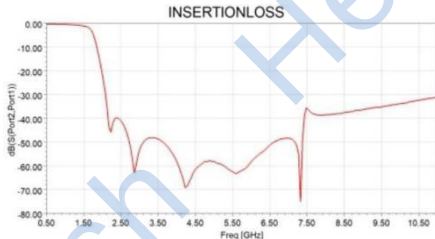

RETURNLOSS

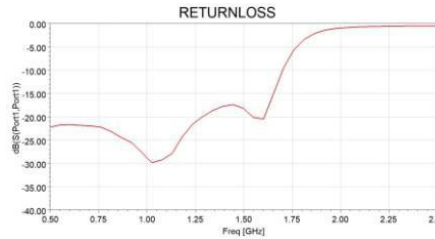

Demo Board P/N: CG-2012 Suggested PCB Layout

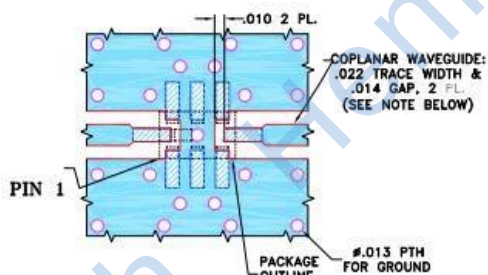

NOTES:


1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- 
 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Pad Connections	
INPUT	8
OUTPUT	4
GROUND	1,2,3,5,6,7

Maximum Ratings	
Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	5.5 W max. @25°C
*Passband rating, derate linearly to 1W at 125°C ambient Permanent damage may occur if any of these limits are exceeded.	

Outline Drawing



Outline Dimensions: Unit (mm)			
A	2.00	E	0.30
B	1.25	F	0.30
C	0.95	G	0.65
D	0.35	wt	0.008g