


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H.wei	17/03/15	17/03/15

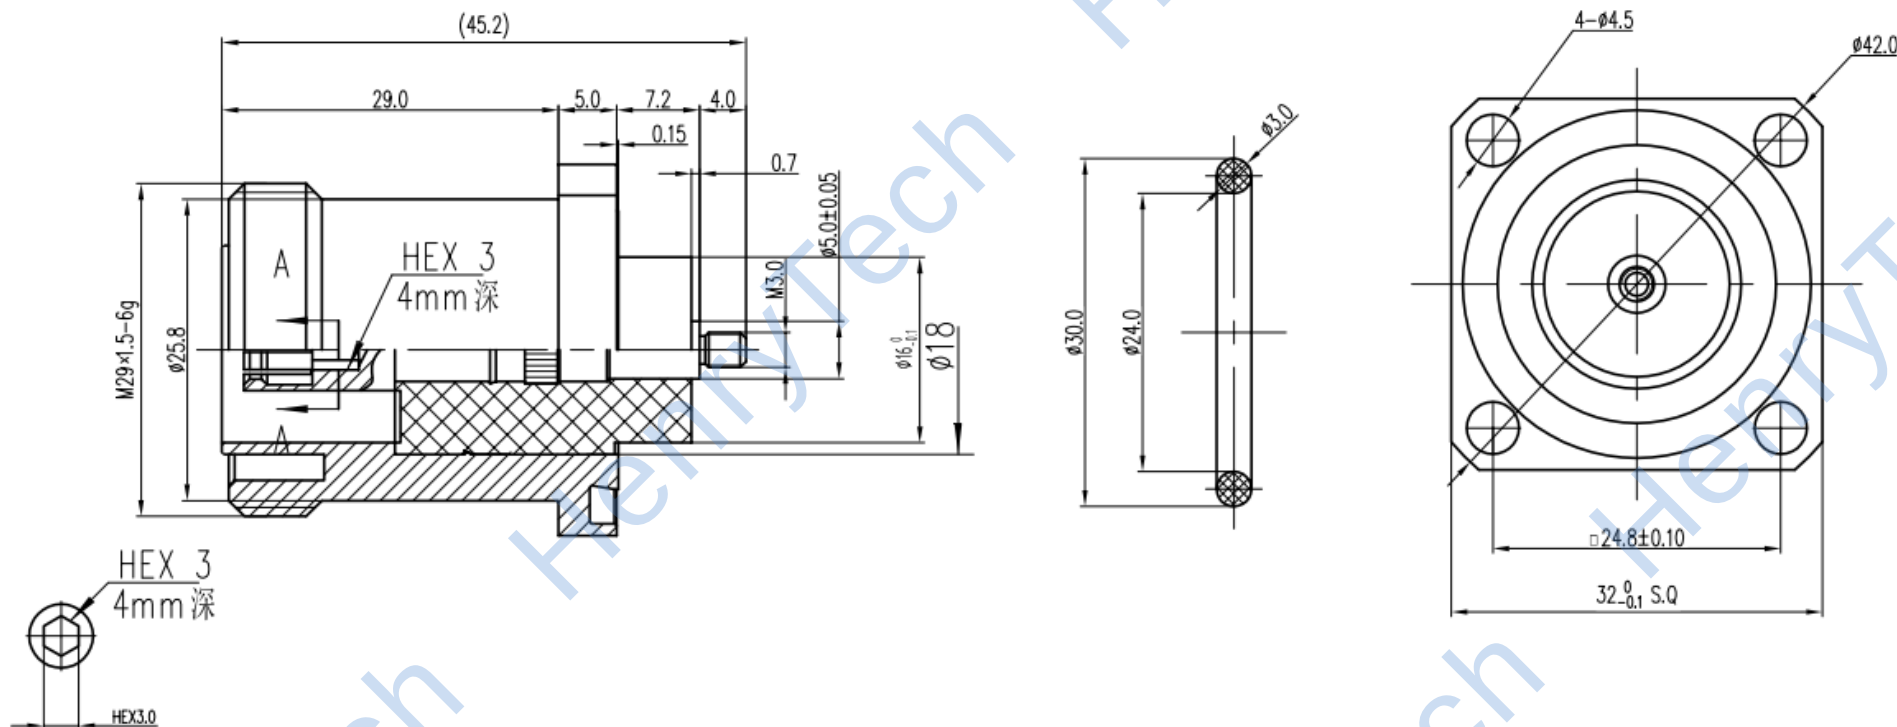

1 Technical Data:

1.1 Impedance	50Ω
1.2 Frequency	DC~7.5GHz
1.3 VSWR	≤1.1@3GHz, 1.15@3G-4.5G
1.4 Dielectric withstanding voltage	≥4000V rms
1.5 Insulation resistance:	≥10000MΩ
1.6 Center contact resistance:	≤0.4 mΩ
1.7 Outer contact resistance:	≤1.5mΩ
1.8 Teracidic Cross-modulation	≤ -165dBc

2 Environmental&Mechanical

2.1 Temperature range	-45℃~85℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass, Suco-plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Phosphor Bronze, Silver plated

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 17/03/15	TITLE:				
ENGINEER: L.yu 17/03/15	L29/Din-KFD2				
APPROVED: W.yi 17/03/15	Din Type Female Conn. Terminal	 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED					
X ±0.50		SIZE:	A4	SCALE:	N/A
.X ±0.20		PART NO:	HL-L29-KFD2	SHEET:	1/1
.XX ±0.10				REV:	A
ANGLES ±1°					