

1


2

3


4

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	12/7/06	12/7/06

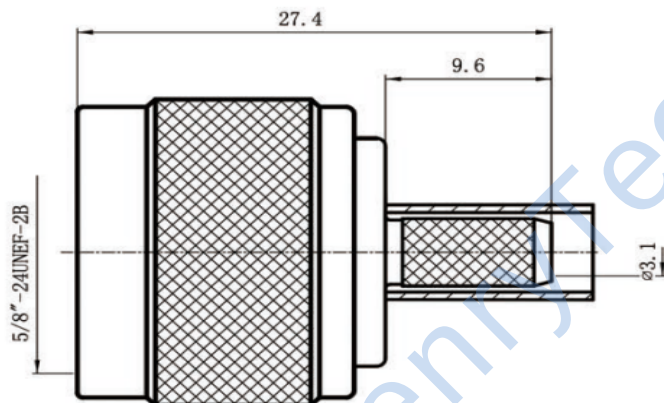

Recommended Cable Stripping Dimension

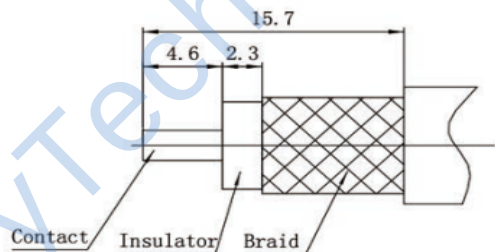

1 Electrical

1.1 Impedance	50 Ω
1.2 Frequency	0~6GHz
1.3 VSWR	1.30:1

2 Environmental&Mechanical


2.1 Temperature range	-40 $^{\circ}$ C~85 $^{\circ}$ C
2.2 RoHS Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass, nickel plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Brass, Gold plated
3.4 Housing:	Brass, nickel plated
3.5 Coupling nut:	Brass, nickel plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 12/07/06	TITLE: RF Coaxial Connector N Male Conn. for LMR200 Cable				
ENGINEER: L.yu 12/07/06		 DIMENSION IN MILLIMETERS (mm)			
APPROVED: W.yi 12/07/06		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-N-J200YA				

1

2

3

4