



This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

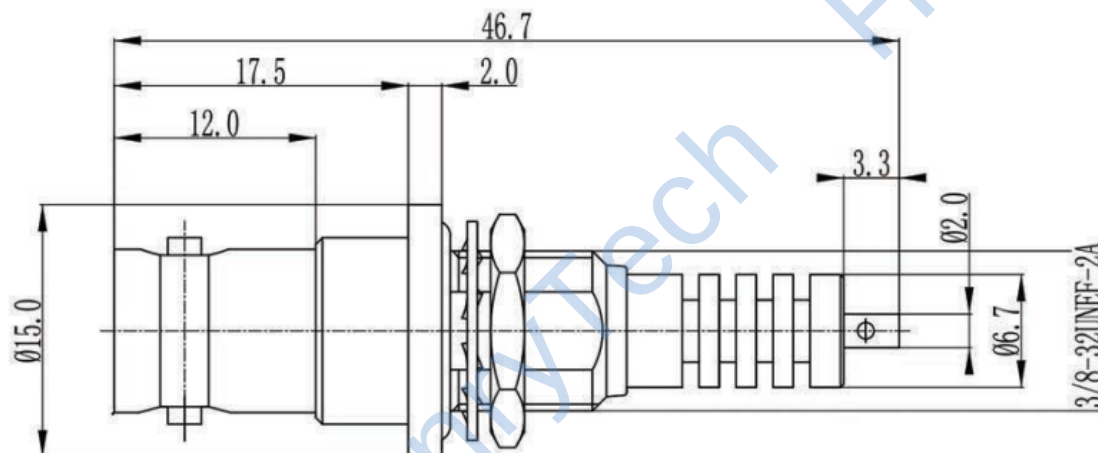

Mounting Hole



1 Electrical

1.1 Frequency: 0-0.3GHz

2 Mechanical

2.1 Center contact: solder

3 Environmental

3.1 Operating temperature -65° to 165°

3.2 RoHS compliant

4 Material&Finish

4.1 Inner Contact: brass, gold plated

4.2 Outer Contact: nickel, gold plated

4.3 Insulators: PTFE

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17

ENGINEER: L.yu 19/03/17

APPROVED: W.yi 19/03/17

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ±0.50

.X ±0.20

.XX ±0.10

ANGLES ±1°

TITLE:

High Voltage RF Connector

SHV male Bulkhead Connector
For Terminal

PART NO: HL-SHV-JYD3



DIMENSION IN MILLIMETERS (mm)

SIZE:
A4

SCALE:
N/A

SHEET:
1/1

REV:
A