

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	12/7/13	12/7/13

1 Electrical


1.1 Impedance	50 Ω
1.2 Frequency	0~12Ghz
1.3 VSWR	1.30:1

2 Environmental&Mechanical

2.1 Temperature range	-45℃~125℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles


3 Materials&plating

3.1 Body:	Brass, Gold Plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Brass,, Gold Plated
3.4 Nut:	Brass, Gold Plated

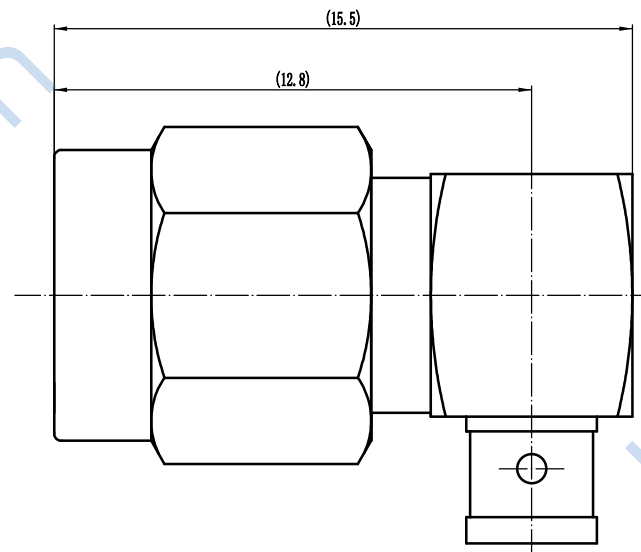

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 12/07/13	TITLE: RF Coaxial Connector SMA Male R/A Conn. For .086 Cable				
ENGINEER: L.yu 12/07/13					
APPROVED: W.yi 12/07/13					
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		PART NO: HL-SMA-JWB2-F	SIZE: A4	SCALE: N/A	SHEET: 1/1