

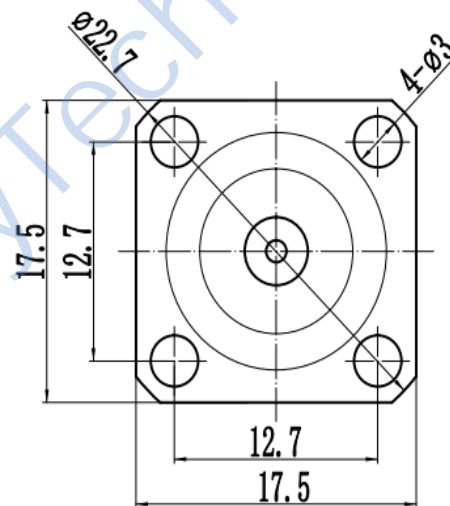


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H.wei	19/03/17	19/03/17

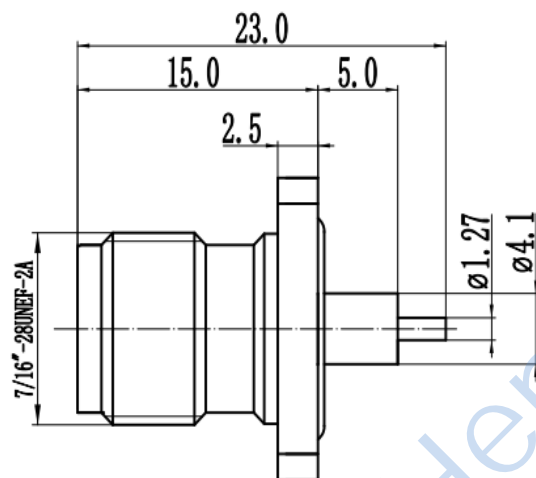

Recommended Mounting Hole

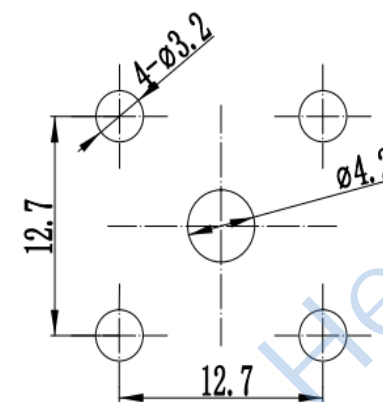

1 Electrical

- 1.1 Impedence 50 Ω
1.2 Frequency DC-6GHz
1.3 VSWR 1.25:1

2 Environmental&Mechanical

- 2.1 Temperature range -45°C~125°C
2.2 RoHS Compliant
2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass, Nickel plated
3.2 Insulator: Teflon
3.3 Contact Pin: Phosphor Bronze, Gold plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED X ± 0.50 .X ± 0.20 .XX ± 0.10 ANGLES $\pm 1^\circ$

TITLE:

RF Coaxial Connector
TNC Female Flange
Connector Terminal

PART NO: HL-TNC-KFD5M



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------