

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H.wei	19/03/17	19/03/17

1 Electrical


- 1.1 Frequency: 0~300MHz
1.2 Working voltage: $\leq 750V$
1.3 Insulation resistance: $\geq 5000M\Omega$
1.4 Dielectric strength: 2000V
1.5 Center Contact resistance: $\leq 5M\Omega$
1.6 Outer Contact resistance: $\leq 5M\Omega$

2 Environmental&Mechanical


- 2.1 Temperature range: $-45^{\circ}C \sim 125^{\circ}C$
2.2 RoHs Compliant: Yes
2.3 Durability: >500 cycles

2 Material&Finish

- 2.1 Inner Contact: Brass, Silver plated
2.2 Outer Contact: Brass, Nickel plated
2.3 Insulators: Teflon

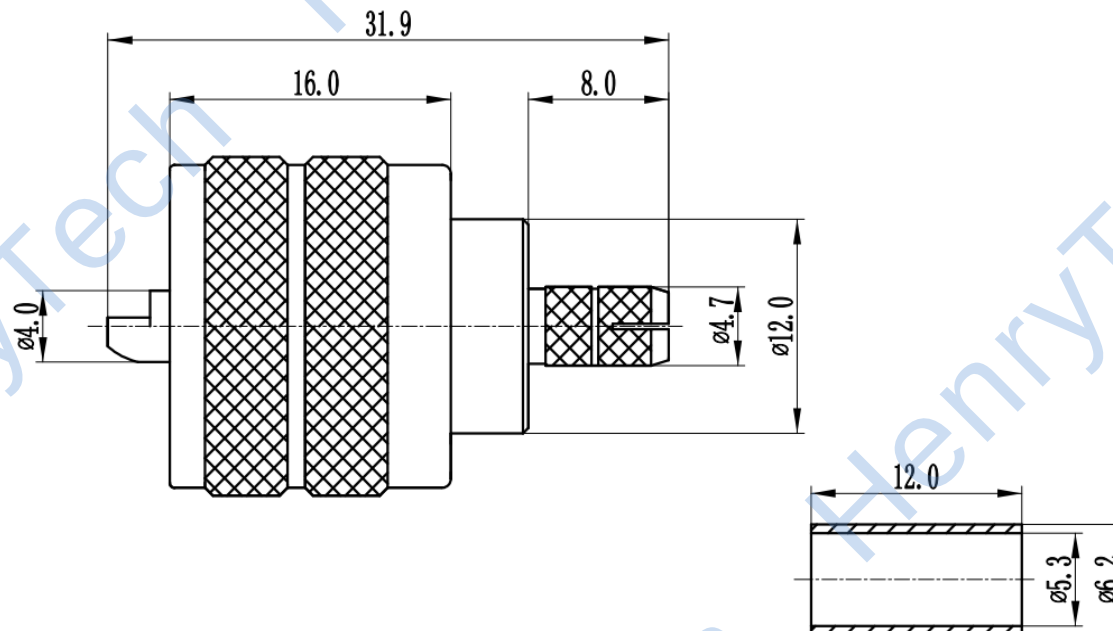

Recommended Cable Stripping Dimension

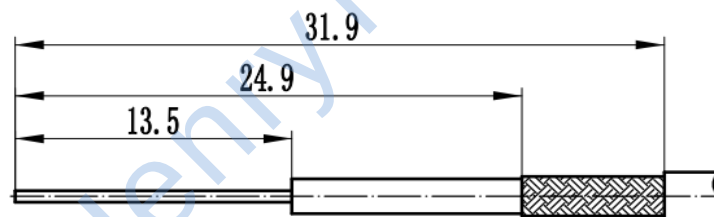

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^{\circ}$

TITLE:
RF Coaxial Connector
UHF male Conn.For RG58
Cable

PART NO: HL-UHF-J5Y-E



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------