

This document contains proprietary information and such information may not be disclosed to others for any purposes,  
not used for sales/marketing/procurement purposes without written permission


REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	01/09/15	01/09/15

## 1. Electrical

- 1.1 Impedance: 50ohm
- 1.2 Frequency: DC-6GHz
- 1.3. Insulation resistance:  $\geq 5000M\Omega$
- 1.4 Dielectric withstanding voltage: 500V(rms)
- 1.5 VSWR: 1.20:1



## 2 Material&Finish

- 2.1 Inner Contact: Brass, gold plated
- 2.2 Outer Contact: Bronze, gold plated
- 2.3 Insulators: PTFE

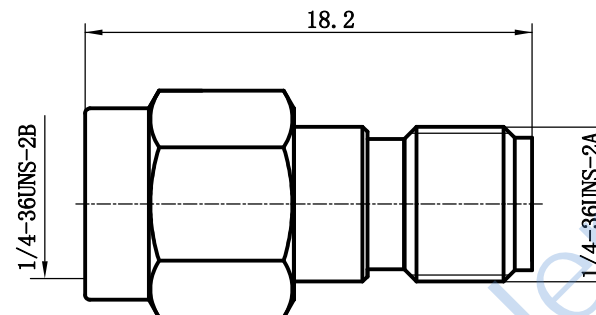

## Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 01/09/15	TITLE:  RF Adaptor  SMA Male to Female Adaptor				
ENGINEER: L.yu 01/09/15		 DIMENSION IN MILLIMETERS (mm)			
APPROVED: W.yi 01/09/15		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-SMA-JKB				