

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

1 Electrical


- 1.1 Impedance
- 1.2 Frequency
- 1.3 VSWR
- 1.4 Power

50 Ω
DC ~40GHz
13:1
0.5W_{max}

2 Materials & plating

- 2.1 Body:
- 2.2 Insulator:
- 2.3 Contact Pin:
- 2.4 Nut:

Stainless Steel; Passivated
Pei
Beryllium-copper, gold plated
Stainless Steel; Passivated

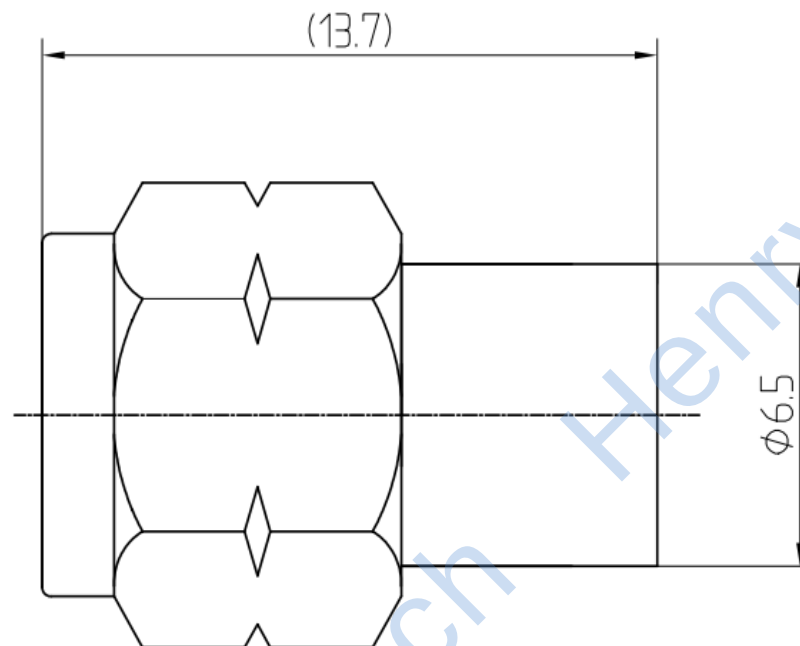

Tel: Lee13890694956

Web: www.hltchips.com

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17		TITLE: RF Termination 2.92 male Conn.Termination				
ENGINEER: L.yu 19/03/17			 DIMENSION IN MILLIMETERS (mm)			
APPROVED: W.yi 19/03/17						
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°						
PART NO: HL-2.92-50JR-0.5		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A	