


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

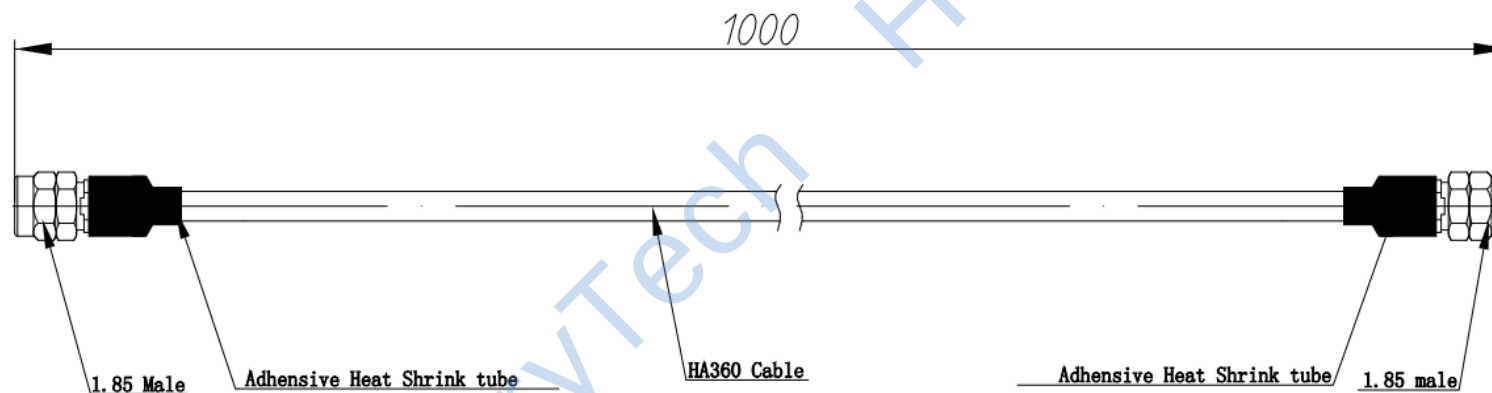

1 Electrical

- 1.1 Impedance: 50Ω
- 1.2 Frequency: DC-65GHz
- 1.3 VSWR: 1.35:1
- 1.4 Insertion loss: 4.5dB max

2 Material&Finish

- 2.1 Pin contact: Beryllium-Copper, gold plated
- 2.2 Body: Stainless Steel, Passivated
- 2.3 Insulators: PEI

3 Interface Standards

- 3.1 1.85mm IEEE STD 287-2007

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:	Cable Assembly		
	1.85 Male to 1.85 Male		
	HA360 Cable Length 1000mm		
PART NO:	HL-1.85M-360-1.85M-1000MM		



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------