


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

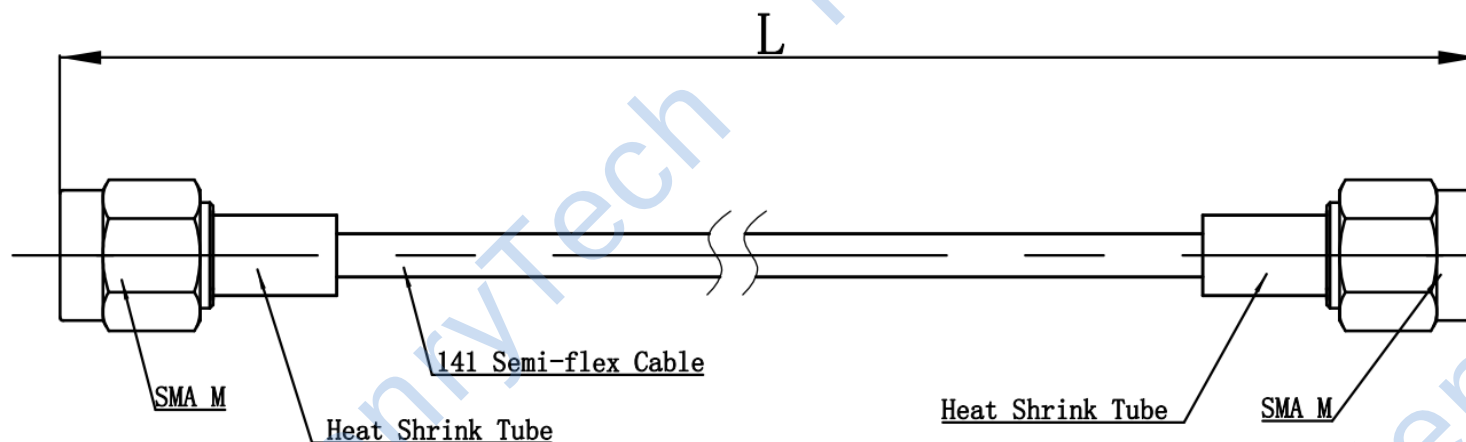

1. Electrical

1.1 Impedance	50 Ω
1.2 Frequency	0~6GHz
1.3 Dielectric withstanding voltage	1000V(rms)
1.4 Center contact resistance	3M Ω
1.5 Outer contact resistance	2M Ω
1.6 Insulation resistance:	5000M Ω
1.7 VSWR	1.20:1

L	Length
L1	L1=520mm
L2	L2=500mm

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:
Cable Assembly
SMA Male Conn. to SMA Male
Conn. for 141 Semi-flex
Cable RG402 Cable Length
520mm
PART NO: HL-SMAM-141-SMAM-520MM



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------