


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

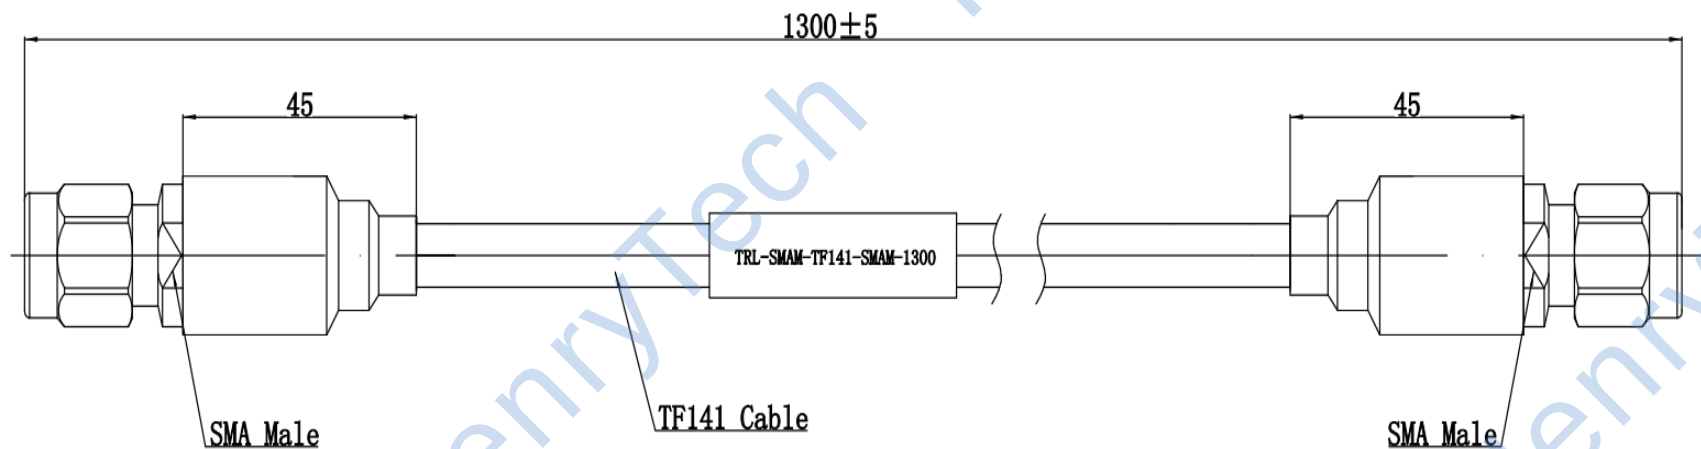

1 Electrical

- 1.1 Impedance: 50Ω
- 1.2 Frequency: DC-18GHz
- 1.3 VSWR: 1.15:1 (DC-6GHz); 1.30:1 (6-18GHz)
- 1.4 Insertion Loss: ≤1.35dB (DC-6GHz); ≤2.6dB (6-18GHz)

2 Material&Finish

- 2.1 Pin contact: Brass, gold plated
- 2.2 Body: Brass Tri-Metal Plated
- 2.3 Insulators: Teflon
- 2.4 Coupling Nut: Stainless Steel, Passivated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
Cable Assembly
SMA Male to SMA Male
for TF141 Cable Length
1300mm

PART NO: HL-SMAM-TF141-SMAM-1300MM



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------