


Chengdu Henglitai Technology Co., Ltd

RF Fixed Attenuator 2.92 2 Watts DC-40GHz

ELECTRICAL DATA						
P/N	Frequency (GHz)	Attenuator Value (dB)				VSWR max
		1-9dB	10dB	20dB	30dB	
HL-2.92MF2-40-XX	DC-40 GHz	±1.0	±1.0	±1.0	±1.0	1.35

MATERIAL&FINISH	
Outerconductor:	Stainless Steel, Passivated
Center Conductor	Beryllium-copper, Gold Plated
Body:	Aluminum
Characteristic impedance :	50Ω
Insulation Resistance :	≧ 5000MΩ
Temperature range:	-55°C~+125°C
Connector Type:	2.92mm (J, K)
Size:	Ø 8x28.7
Durability (matings):	≧ 500
VSWR:	≧ 1.25
Power:	2W
Weight:	4g

Outline Drawing:

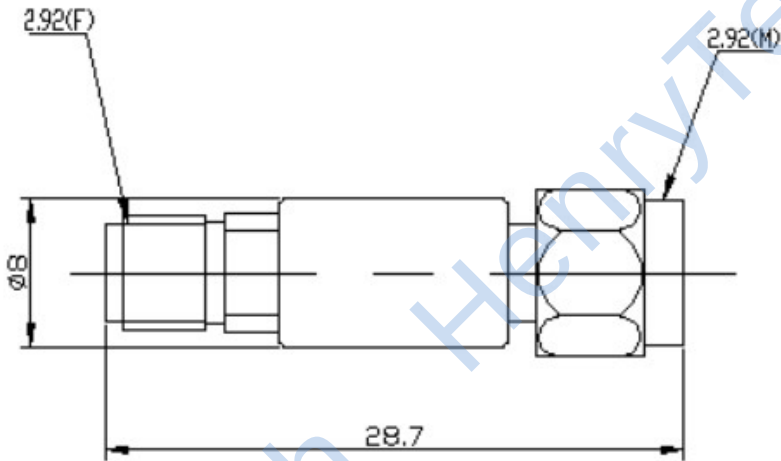

No. 198 Tianqin East Street, Gaoxin West District,
Chengdu City
Tel: +86-28-85589664
E_mail: mr_li@henglitaitech.com
web: www.hltchips.com