

1


2

3

4

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	12/7/06	12/7/06

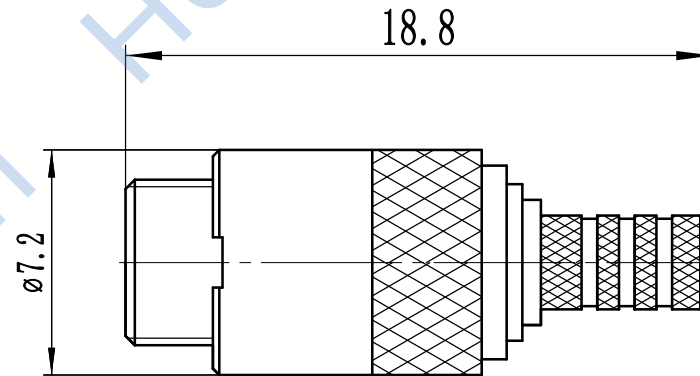

1 Environmental&Mechanical环境&机械性能

1.1 Temperature range温度范围: -55℃~+125℃

1.2 RoHs Compliant 符合RoHs

1.3 Durability寿命: >500 cycles (次)



2 Materials&Finish材料&涂镀

2.1 Coupling Nut螺套: Brass, Gold plated 黄铜, 镀金


2.2 Insulator 绝缘介质: Teflon 聚四氟乙烯

2.3 Contact Pin中心导体: Beryllium-Copper, Gold plated 铍青铜, 镀金

2.4 Body外壳: Beryllium-Copper, Gold plated 铍青铜, 镀金

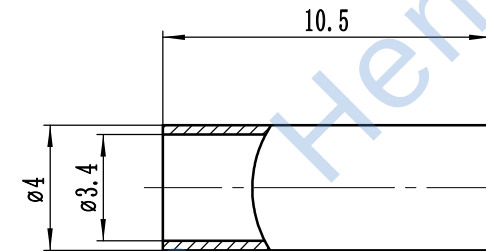

Recommended Cable Stripping Dimension

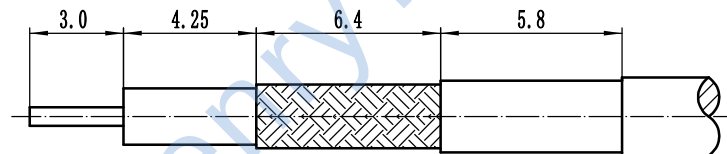

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 12/07/06
ENGINEER: L.yu 12/07/06
APPROVED: W.yi 12/07/06
TOLERANCES UNLESS OTHERWISE SPECIFIED
.X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
同轴旋转自锁紧, 接上图所示
结构 75 Ω 双层屏蔽同轴电
缆, 母头连接器(经济型)。

PART NO: HL-ZLC-KYS



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------