

1


2

3

4

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	12/7/06	12/7/06

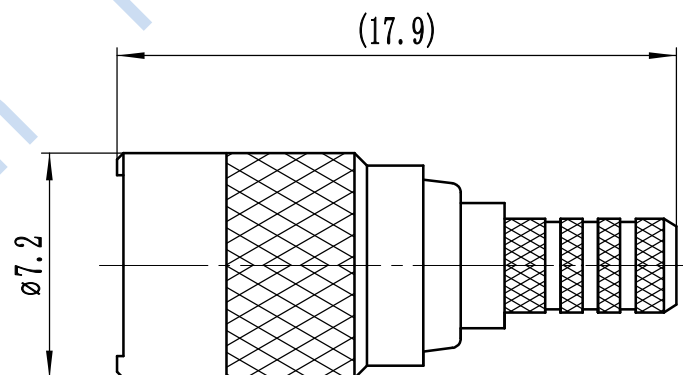

1 Environmental&Mechanical环境&机械性能

1.1 Temperature range温度范围: -55℃~+125℃

1.2 RoHs Compliant 符合RoHs

1.3 Durability寿命: >500 cycles (次)


2 Materials&Finish材料&涂镀

2.1 Coupling Nut螺套: Brass, Gold plated 黄铜, 镀金


2.2 Insulator 绝缘介质: Teflon 聚四氟乙烯

2.3 Contact Pin中心导体: Beryllium-Copper, Gold plated 铍青铜, 镀金

2.4 Body外壳: Beryllium-Copper, Gold plated 铍青铜, 镀金

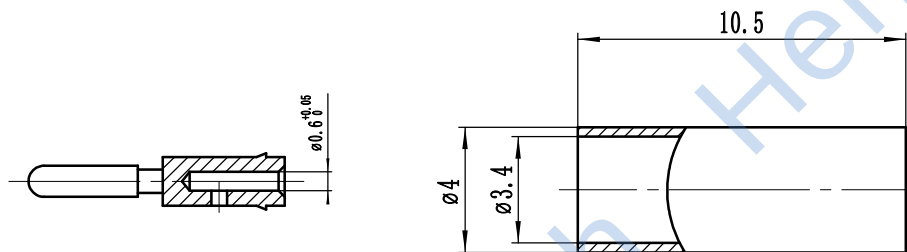


Recommended Cable Stripping Dimension

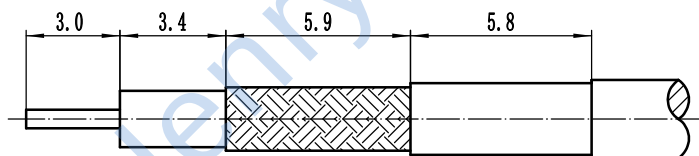

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 12/07/06	TITLE: 同轴旋转自锁紧, 接上图所示 结构 75 Ω 双层屏蔽同轴电 缆, 公头连接器(经济型).				
ENGINEER: L.yu 12/07/06		 DIMENSION IN MILLIMETERS (mm)			
APPROVED: W.yi 12/07/06		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
TOLERANCES UNLESS OTHERWISE SPECIFIED .X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-ZLC-JYS				

1

2

3

4